



- G1641** Emergency Shower with Drench Hose, Horizontally Mounted, Plastic Shower Head
- G1641SSH** Emergency Shower with Drench Hose, Horizontally Mounted, Stainless Steel Shower Head



Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

Application: Emergency shower for horizontal mounting with auxiliary hand-held drench hose unit.

Shower Head: 10" diameter with 20 GPM flow control. Shower head is orange ABS plastic (G1641) or stainless steel (G1641SSH).

Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

Drench Hose Unit: Auxiliary hand-held drench hose for rinsing eyes, face or body. Unit has single FS-Plus™ spray type outlet head, self-closing valve with squeeze handle, 8 ft. reinforced PVC hose and wall hook.

Pipe and Fittings: 1" IPS galvanized steel nipple and street elbow.

Supply: 1" NPT female inlet.

Sign: ANSI-compliant identification sign.


Available Options

- PCC** All-polished chrome plated brass construction.
- GRN** Safety green ABS plastic shower head.
- YEL** Safety yellow ABS plastic shower head.
- AP280-200** Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.
- AP250-015** Modesty curtain for horizontal shower installation.
- G6040** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.



□ **G1641** Emergency Shower with Drench Hose, Horizontally Mounted, Plastic Shower Head

□ **G1641SSH** Emergency Shower with Drench Hose, Horizontally Mounted, Stainless Steel Shower Head

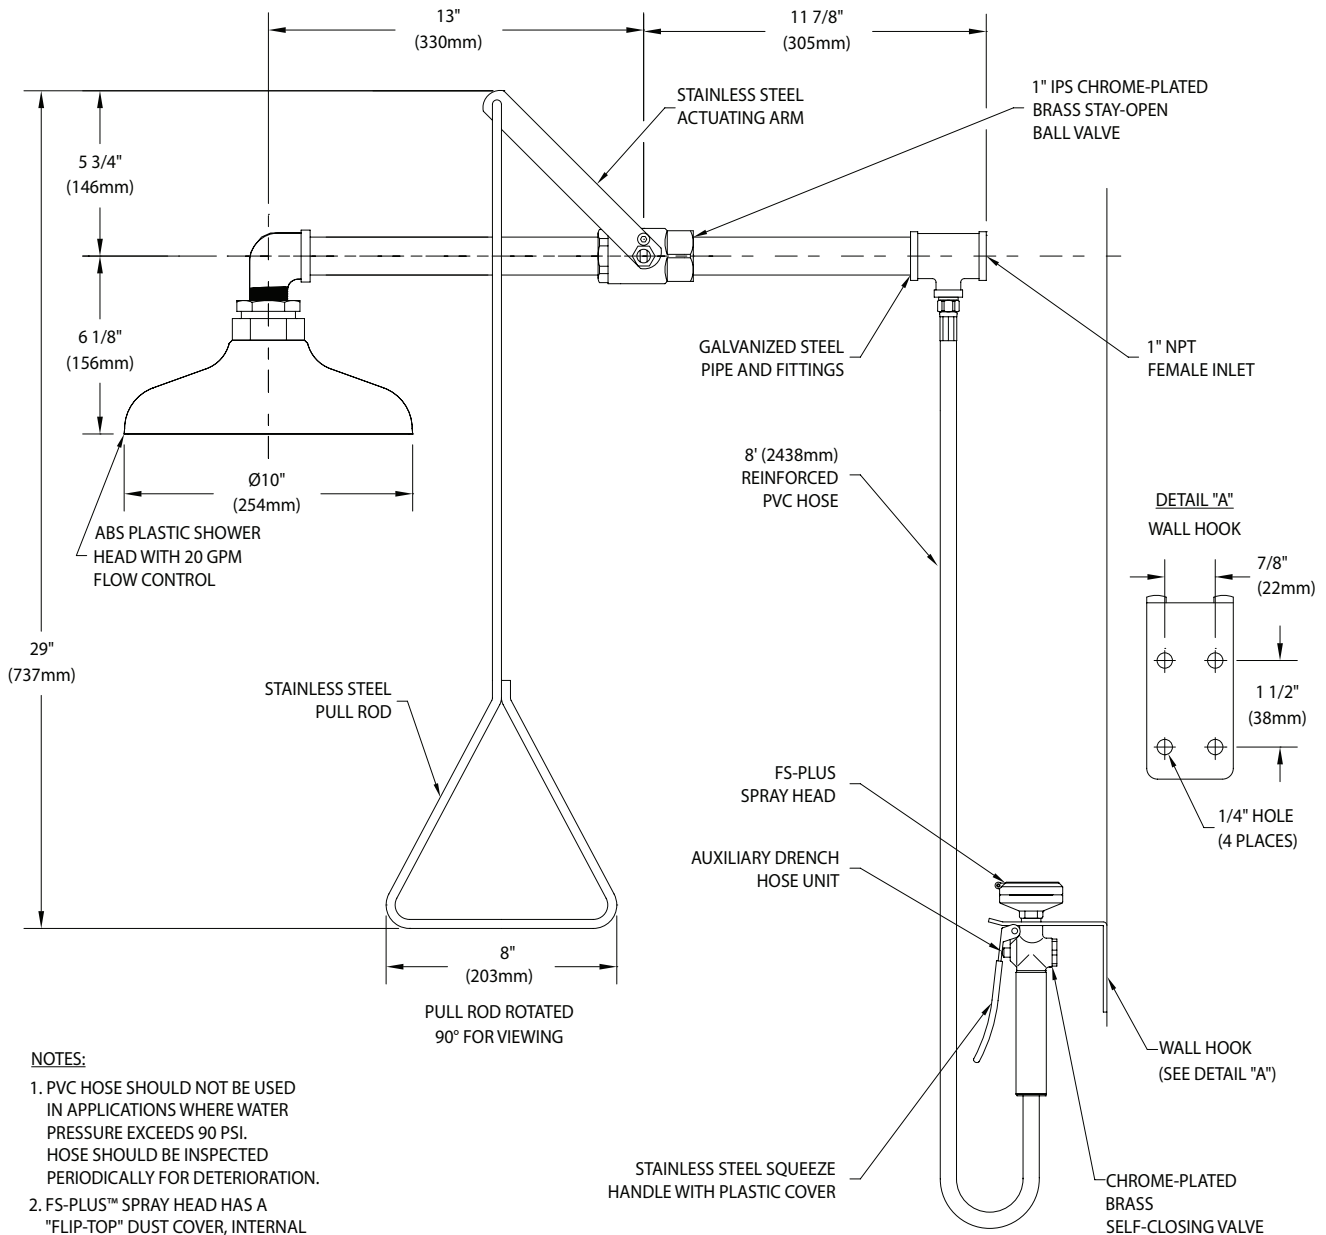

NOTES:

1. PVC HOSE SHOULD NOT BE USED IN APPLICATIONS WHERE WATER PRESSURE EXCEEDS 90 PSI. HOSE SHOULD BE INSPECTED PERIODICALLY FOR DETERIORATION.
2. FS-PLUS™ SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 040318

Distributed by:
Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
 esupport@safetyemporium.com
 www.safetyemporium.com

Rev. 032818

Sign Included

