



- G1662** Emergency Shower, Free Standing, Plastic Shower Head
- G1662SSH** Emergency Shower, Free Standing, Stainless Steel Shower Head

Application: Free standing emergency shower.

Shower Head: 10" diameter with 20 GPM flow control. Shower head is orange ABS plastic (G1662) or stainless steel (G1662SSH).

Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene covers on piping for high visibility and corrosion resistance.

Supply: 1 1/4" NPT female top or side inlet.

Sign: ANSI-compliant identification sign.

Available Options


- PCC** All-polished chrome plated brass construction.
- GRN** Safety green ABS plastic shower head.
- YEL** Safety yellow ABS plastic shower head.
- HS** Auxiliary hand-held drench hose for rinsing eyes, face or body. Unit has single FS-Plus™ spray type outlet head, self-closing valve with squeeze handle, 8 ft. reinforced PVC hose and mounting bracket.
- AP275-200** Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.
- AP250-015** Modesty curtain for horizontal shower installation.
- G6040** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.



Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com



- **G1662** Emergency Shower, Free Standing, Plastic Shower Head
- **G1662SSH** Emergency Shower, Free Standing, Stainless Steel Shower Head

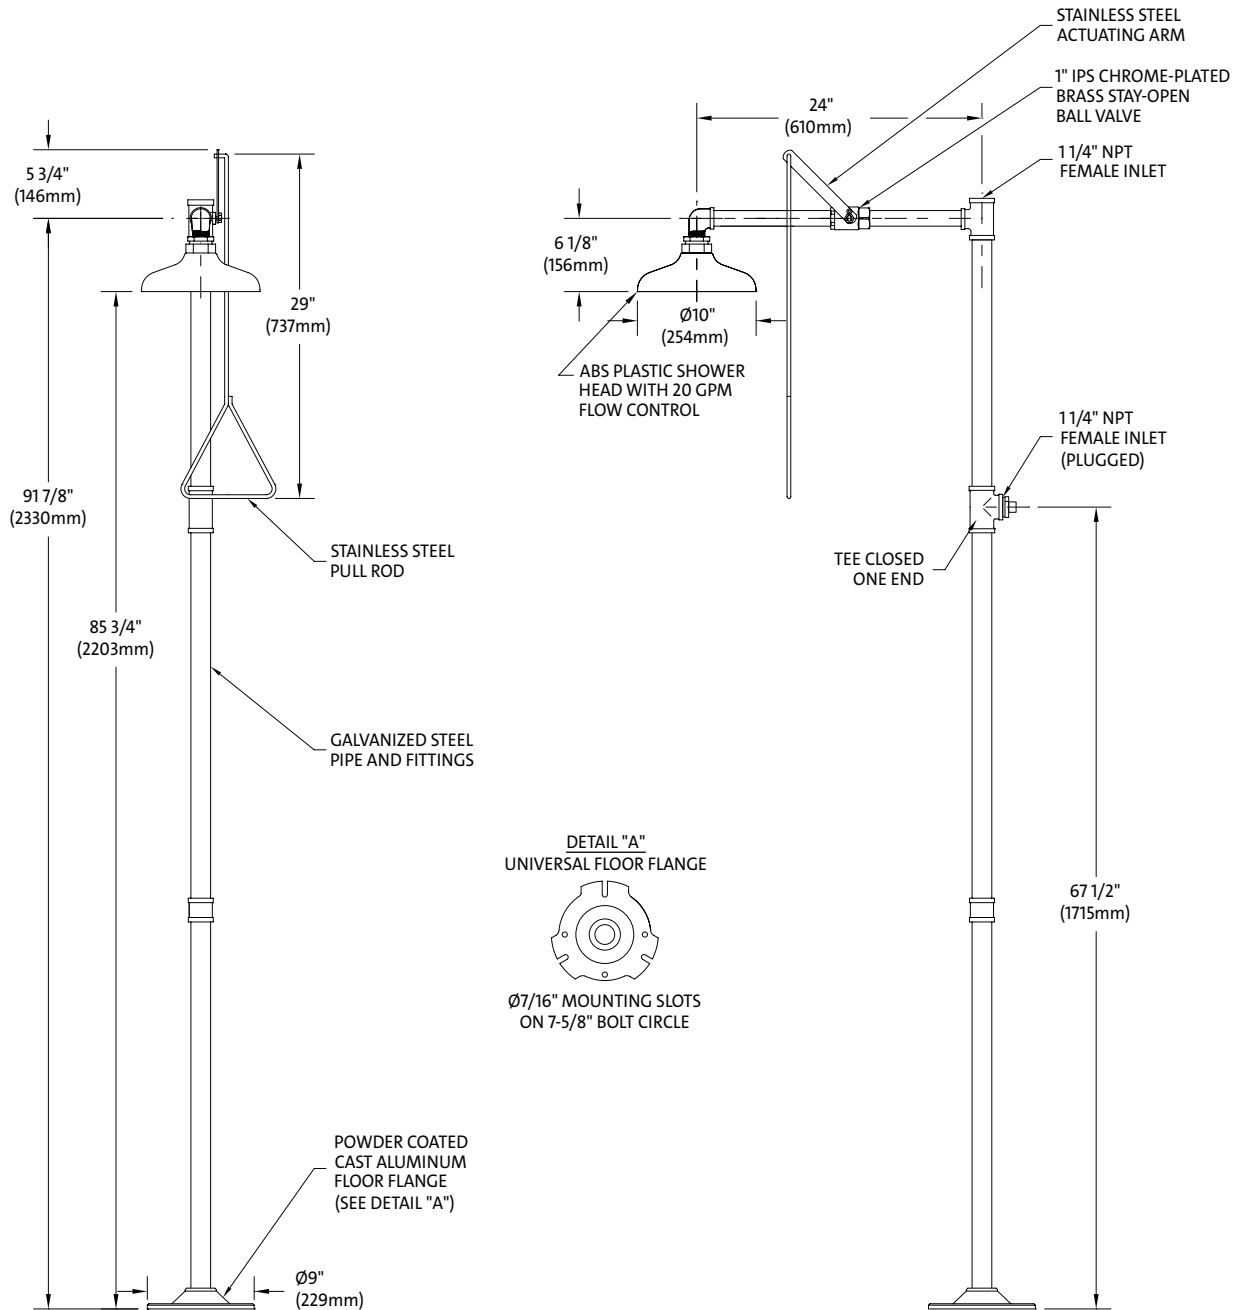

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 111919

Distributed by:
Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
 esupport@safetyemporium.com
 www.safetyemporium.com

Sign Included

