



G1691 Emergency Shower, Horizontally Mounted, All-Stainless Steel

Application: All-stainless steel emergency shower for horizontal mounting. Ideal for use in areas where highly corrosive materials are handled, as well as in laboratory and clean room applications.

Shower Head: 10" diameter stainless steel with 20 GPM flow control.

Valve: 1" IPS stainless steel stay-open ball valve. Valve has stainless steel ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

Pipe and Fittings: Schedule 40 stainless steel.

Supply: 1" NPT female inlet.

Sign: ANSI-compliant identification sign.

Available Options


- PSH** Orange ABS plastic shower head.
- AP280-200** Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.
- AP250-015** Modesty curtain for horizontal shower installation.
- G6040** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.



Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com



□ G1691 Emergency Shower, Horizontally Mounted, All-Stainless Steel

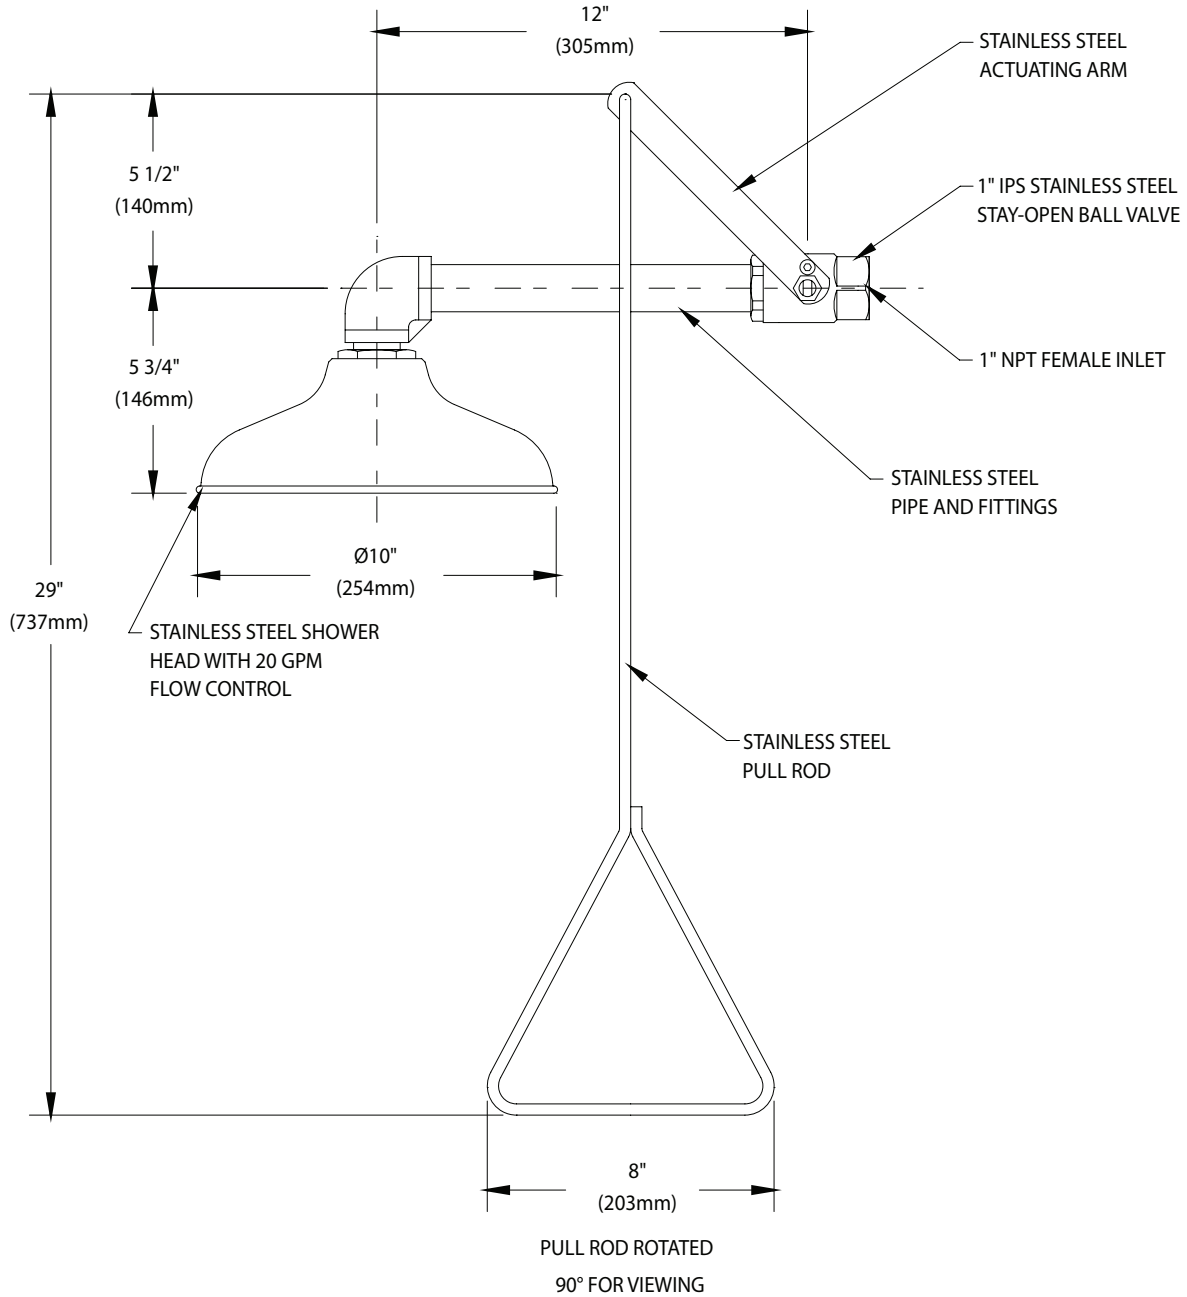

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 1117

Distributed by:
Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
 esupport@safetyemporium.com
 www.safetyemporium.com

Sign Included

