


G1775 Eye/Face Wash, Deck Mounted 90° Swivel, Right Hand Mounting G1775LH Eye/Face Wash, Deck Mounted 90° Swivel, Left Hand Mounting





Application: Eye/face wash for mounting on counter next to sink. Spray heads swivel 90 degrees from storage to operational position. Water flow is activated by flag handle.

Spray Head Assembly: Two FS-Plus[™] spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Mounting: Unit may be mounted on right side (G1775) or left side (G1775LH) of sink. Furnished with locknut and washer for securing unit to countertop. Provide 7/8" diameter hole in counter.

Construction: Polished chrome plated brass.

Supply: 1/2" NPT male inlet.

Guardian Equipment

Chicago, IL 60642

Sign: ANSI-compliant identification sign.

1140 N North Branch St 312 447 8101 FACSIMILE

Quality Assurance: Unit is completely assembled and water tested prior to shipment.

312 447 8100 TELEPHONE

gesafety.com

Available Options


G6020 Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.

> Distributed by: Safety Emporium PO Box 1003 Blackwood, NJ 08012 Ph: (866) 326-5412 toll-free Fax: (856) 553-6154 esupport@safetyemporium.com www.safetyemporium.com





□ G1775 Eye/Face Wash, Deck Mounted 90° Swivel, Right Hand Mounting
□ G1775LH Eye/Face Wash, Deck Mounted 90° Swivel, Left Hand Mounting

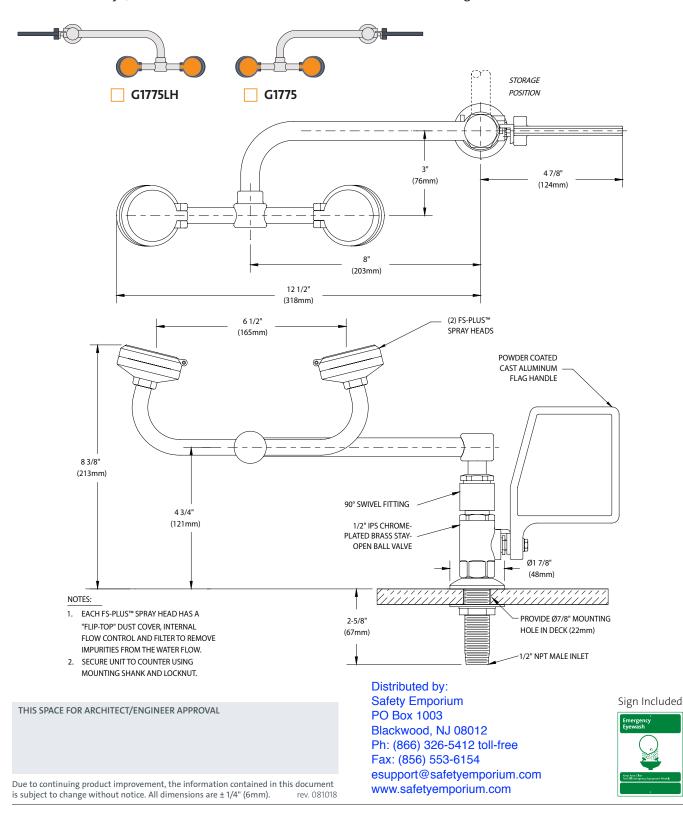

Guardian Equipment312 4471140 N North Branch St312 447Chicago, IL 60642gesafet

312 447 8100 TELEPHONE 312 447 8101 FACSIMILE gesafety.com Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

