



G1819 Eyewash, Wall Mounted, Less Bowl



Application: Eyewash for wall mounting. Two GS-Plus[™] spray-type outlet heads deliver a flood of water for rinsing eyes. Unit is provided without bowl or drain for waste water. Note: Floor drain should be provided underneath unit to prevent accumulation of water on floor.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Mounting: Heavy duty cast aluminum wall bracket with corrosion resistant powder coated finish.

Construction: Polished chrome plated brass.

Supply: 1/2" NPT female inlet.

Sign: ANSI-compliant identification sign.

Quality Assurance: Unit is completely assembled and water tested prior to shipment.

Available Options

- HS Auxiliary hand-held drench hose for rinsing eyes, face or body.
- **G6020** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.

Distributed by: Safety Emporium PO Box 1003 Blackwood, NJ 08012 Ph: (866) 326-5412 toll-free Fax: (856) 553-6154 esupport@safetyemporium.com www.safetyemporium.com


312 447 8100 TELEPHONE gesafety.com





Eyewashes

□ **G1819** Eyewash, Wall Mounted, Less Bowl

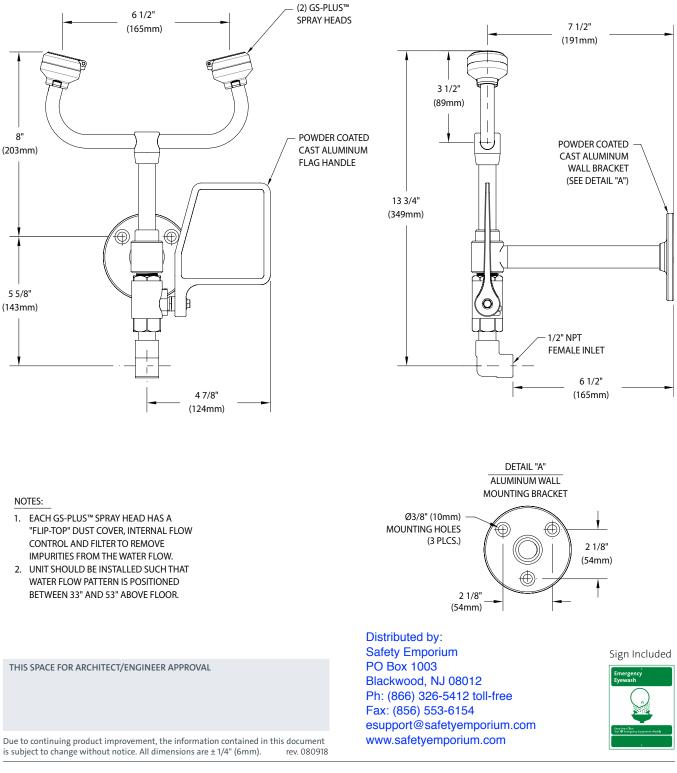

Guardian Equipment 1140 N North Branch St Chicago, IL 60642 312 447 8100 TELEPHONE 312 447 8101 FACSIMILE gesafety.com Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

