



- G1902HS** Safety Station with Eyewash, Auxiliary Drench Hose, Stainless Steel Bowl
- G1902P-HS** Safety Station with Eyewash, Auxiliary Drench Hose, Plastic Bowl

Application: Combination eyewash and shower safety station. Furnished with auxiliary drench hose for rinsing user's eyes, face or body. Two GS-Plus™ spray-type outlet heads deliver a flood of water for rinsing eyes.

Shower Head: 10" diameter orange ABS plastic.

Shower Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

Eyewash Bowl: 11-1/2" diameter. Bowl is stainless steel (G1902HS) or orange ABS plastic (G1902P-HS).

Eyewash Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals.

drench hose unit: Auxiliary hand-held drench hose for rinsing eyes, face or body. Unit has single GS-Plus™ spray type outlet head, self-closing valve with squeeze handle, 8 ft. reinforced PVC hose and wall hook.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene covers for vertical piping for high visibility and corrosion resistance.

Supply: 1-1/4" NPT female top or side inlet.

Waste: 1-1/4" NPT female outlet. Outlet can be positioned at either 9-1/4" or 19-5/8" above finished floor by reversing lower pipe nipples.

Sign: Furnished with ANSI-compliant identification sign.

Quality Assurance: Valve and spray head assemblies are factory assembled and water tested prior to shipment.

Available Options


- GC** Powder coated finish on galvanized Pipe and Fittings:. Available colors include orange, yellow, red and green.
- FC20** Regulates shower flow rate to 20 GPM.
- GRN** Green ABS plastic shower head.
- YEL** Yellow ABS plastic shower head.
- SSH** Stainless steel shower head.
- AP275-100 Electric Light and Alarm Horn**
Light and alarm horn summon assistance when eyewash or shower is activated.
- AP250-015 Modesty Curtain**
Modesty curtain for mounting on safety station.
- TMV** G3800LF thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014.





G1902HS Safety Station with Eyewash, Auxiliary Drench Hose, Stainless Steel Bowl

G1902P-HS Safety Station with Eyewash, Auxiliary Drench Hose, Plastic Bowl

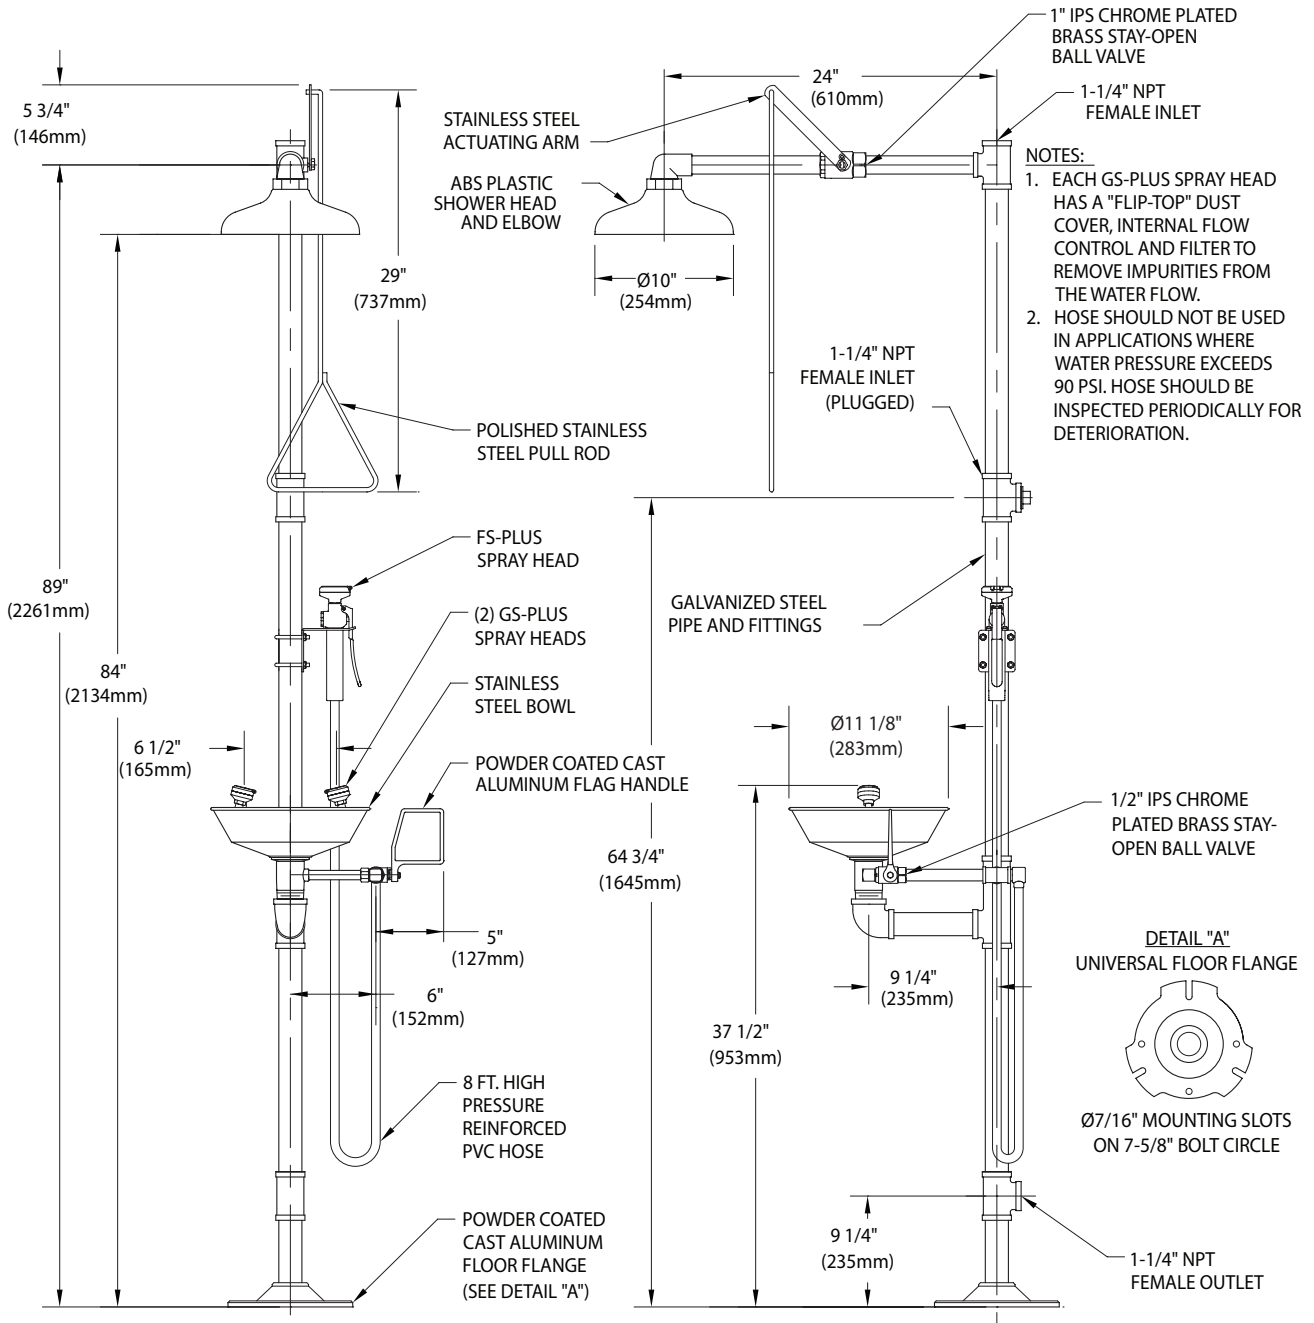

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012

Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4"$ (6mm). rev. 0615

Guardian Equipment 312 447 8100 TELEPHONE
1140 N North Branch St 312 447 8101 FACSIMILE
Chicago, IL 60642 gesafety.com



UPC listed 8116. ETL listed 101496. Units have been tested to and comply with ANSI Z358.1-2014.

