



- GBF1658** Barrier-Free Emergency Shower, Semi-Concealed, Stainless Steel Shower Head and Pipe
- GBF1658PCC** Barrier-Free Emergency Shower, Semi-Concealed, Stainless Steel Shower Head, Polished Chrome Plated Pipe



Application: Barrier-Free emergency shower for semi-concealed mounting in a finished ceiling. Unit is designed for installation in ceilings 8-10 feet above finished floor.

ADA Compliance: When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach and distance from obstructions).

Shower Head: 10" diameter stainless steel with 20 GPM flow control. Furnished with vertical supply pipe and ceiling escutcheon for mounting shower head at desired height above finished floor.

Valve: 1" IPS brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm, 85" stainless steel pull rod and stainless steel ceiling guide plate.

Pipe and Fittings: Exposed pipe is brushed stainless steel (GBF1658) or polished chrome plated brass (GBF1658PCC).

Supply: 1" NPT female inlet.

Sign: ANSI-compliant identification sign.


Available Options

- AP280-230** Electric strobe light and alarm horn unit for recess mounting in finished wall. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.
- G3800LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.





- GBF1658 Barrier-Free Emergency Shower, Semi-Concealed, Stainless Steel Shower Head and Pipe
- GBF1658PCC Barrier-Free Emergency Shower, Semi-Concealed, Stainless Steel Shower Head, Polished Chrome Plated Pipe

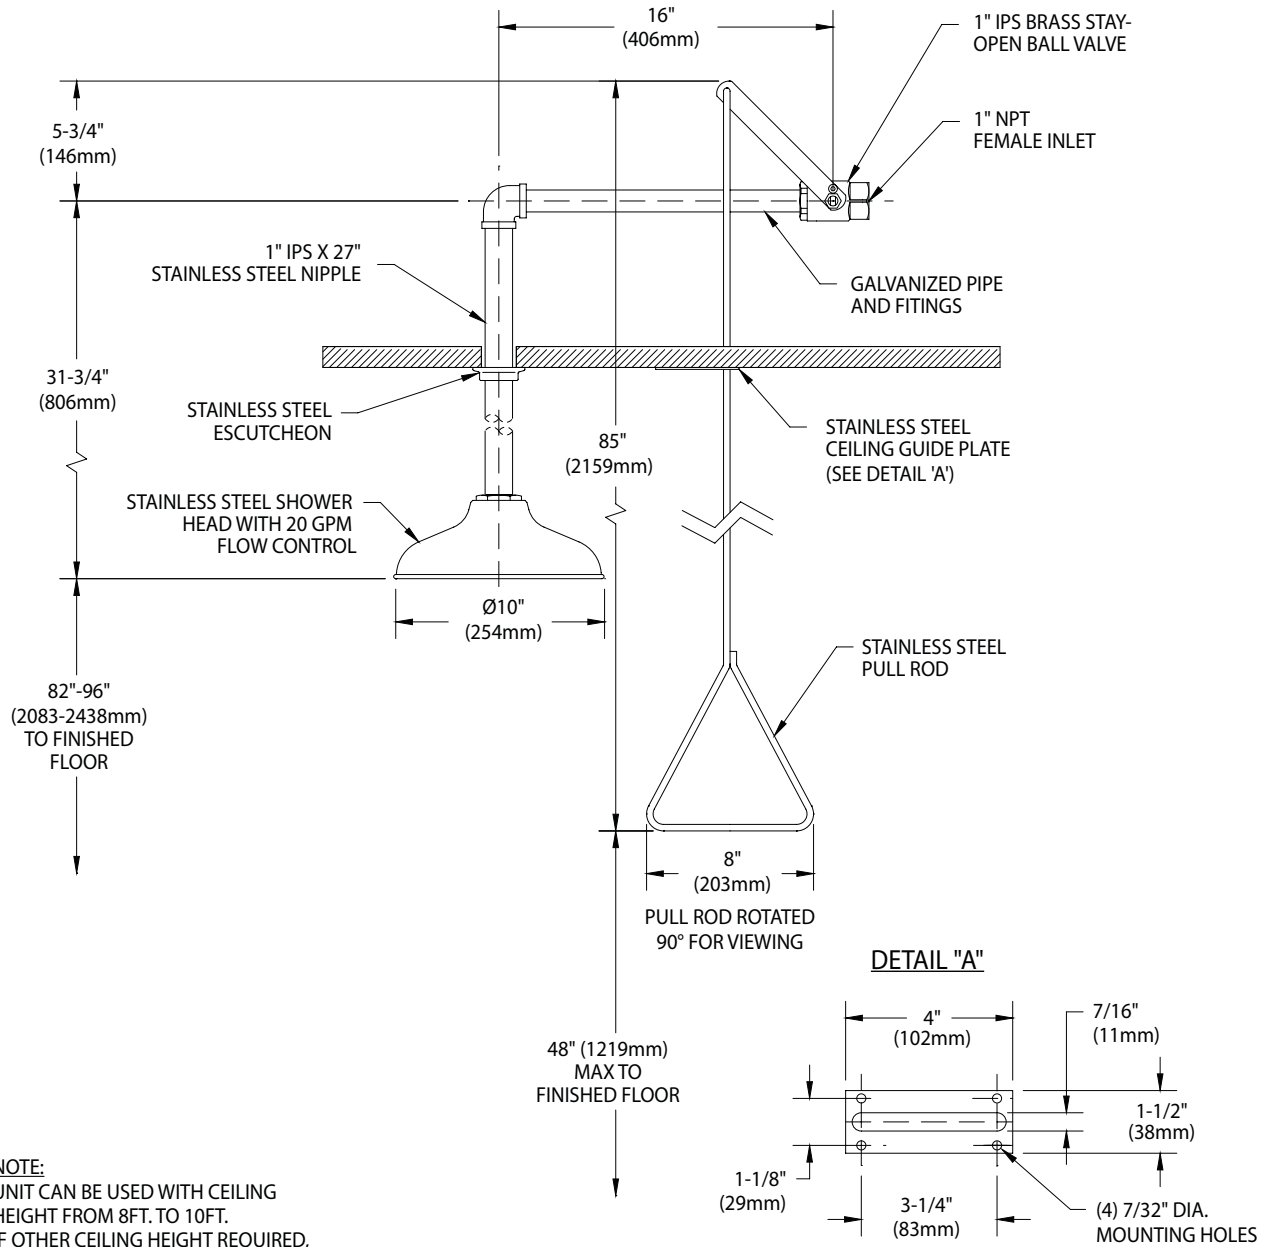

NOTE:
 UNIT CAN BE USED WITH CEILING HEIGHT FROM 8FT. TO 10FT.
 IF OTHER CEILING HEIGHT REQUIRED, PLEASE CONTACT FACTORY.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 1017

