



GBFVR1909 Vandal-Resistant Safety Station with WideArea™ Eye/Face Wash

Application: Combination WideArea™ eye/face wash and shower safety station with vandal-resistant construction. Ideal for use in schools and other areas where equipment may be subject to abuse.

ADA Compliance: Unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach, minimum knee clearance and distance from obstructions).

Shower Head: 8" diameter chrome plated cast brass shower head with 20 GPM flow control.

Shower Valve: 1" IPS chrome plated brass stay-open ball valve with stainless steel actuating arm and 47-1/2" stainless steel pull rod.

Spray Head Assembly: Four vandal-resistant GS-Plus™ spray heads. Each head has a brass body, stainless steel "flip top" dust cover, internal flow control and filter to remove impurities from the water flow. Spray heads have retaining ring with set screw to protect internal components.

Eye/Face Wash Bowl: 11-1/2" stainless steel.

Eye/Face Wash Valve: 1/2" IPS chrome plated brass stay-open ball valve with flag handle.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene covers on piping for high visibility and corrosion resistance.

Supply: 1-1/4" NPT female top and side inlet.

Waste: 1-1/4" NPT female outlet.

Sign: ANSI-compliant identification sign.

Quality Assurance: Valve, bowl and spray head assemblies are factory assembled and water tested prior to shipment.

This model is the recommended replacement for the GBFVR1909SC which was identical but had self-closing valves. Guardian no longer manufactures self-closing valves as these do not meet ANSI standards.


Available Options

- APBF250-015 Modesty Curtain**
Modesty curtain for mounting on safety station.
- AP275-200 Electric Light and Alarm Horn**
Flashing light and alarm horn for mounting on safety station. Light is illuminated and horn sounds when either eyewash or shower is activated. Light/alarm unit is recommended as additional deterrent to vandalism and unauthorized activation of unit.
- TMV G3800LF** thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014.





GBFVR1909 Vandal-Resistant Safety Station with WideArea™ Eye/Face Wash

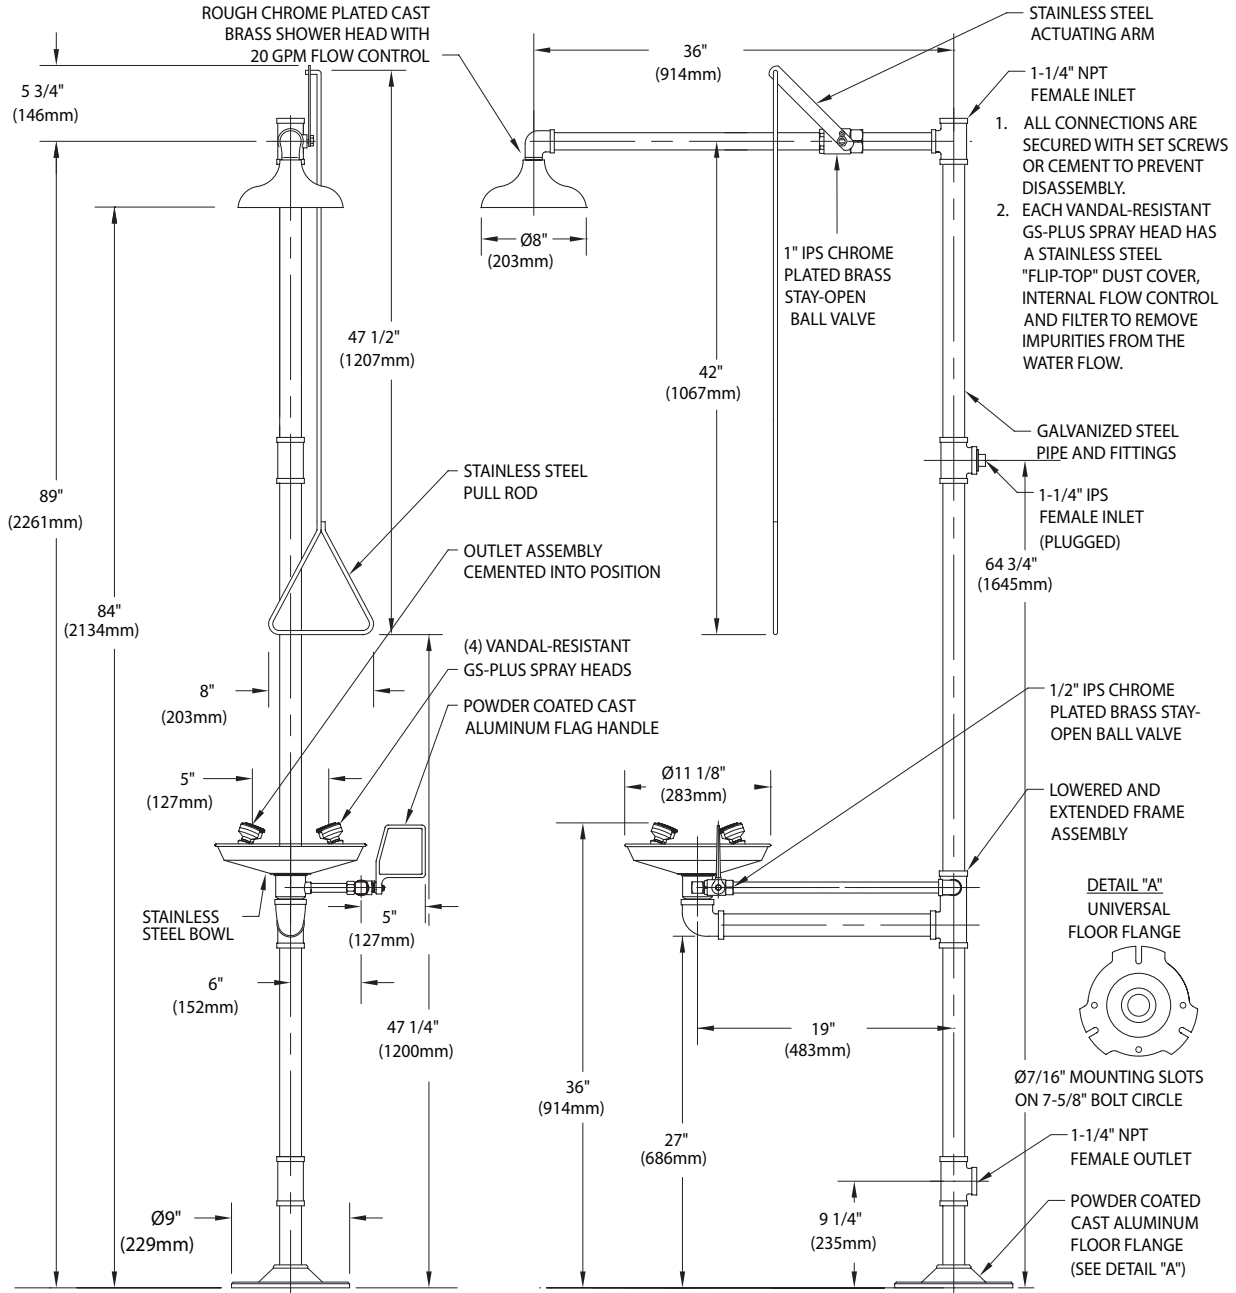

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 015

Distributed by:
Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
 esupport@safetyemporium.com
 www.safetyemporium.com

Sign Included



Guardian Equipment 312 447 8100 TELEPHONE
 1140 N North Branch St 312 447 8101 FACSIMILE
 Chicago, IL 60642 gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.



ETL Listed 101496. Units have been tested to and comply with ANSI Z358.1-2014.

