



- GFR1205** Freeze-Resistant Emergency Shower, Horizontally Mounted, Plastic Shower Head
- GFR1205SSH** Freeze-Resistant Emergency Shower, Horizontally Mounted, Stainless Steel Shower Head

**Application:** Freeze-resistant emergency shower for horizontal mounting. Valve and supply line are located behind wall in heated area to prevent freezing. Since unit is intended for use in cold weather conditions, consideration should be given to supplying unit with tempered water in accordance with ANSI Z358.1-2014. See “Tempering Units” section for more information.

**Shower Head:** 10" diameter. Shower head is orange ABS plastic (GFR1205) or stainless steel (GFR1205SSH).

**Valve:** 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals. Valve handle is mounted on extension rod that projects through wall. Specify wall thickness when ordering.

**Pipe and Fittings:** Supplied by others.

**Supply:** 1" NPT female inlet.

**Sign:** ANSI-compliant identification sign.

### Available Options

- FC20** Regulates shower flow rate to 20 GPM.
- GRN** Safety green ABS plastic shower head.
- YEL** Safety yellow ABS plastic shower head.
- PCH** Polished chrome plated cast brass shower head.
- AP280-200 Electric Light and Alarm Horn** Flashing light and horn serve to summon assistance when shower is activated.
- TMV** G3800LF thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to “Tempering Units” section for complete technical and product selection information.




Distributed by:  
Safety Emporium  
PO Box 1003  
Blackwood, NJ 08012

Ph: (866) 326-5412 toll-free  
Fax: (856) 553-6154  
esupport@safetyemporium.com  
www. safetyemporium.com



- GFR1205** Freeze-Resistant Emergency Shower, Horizontally Mounted, Plastic Shower Head
- GFR1205SSH** Freeze-Resistant Emergency Shower, Horizontally Mounted, Stainless Steel Shower Head

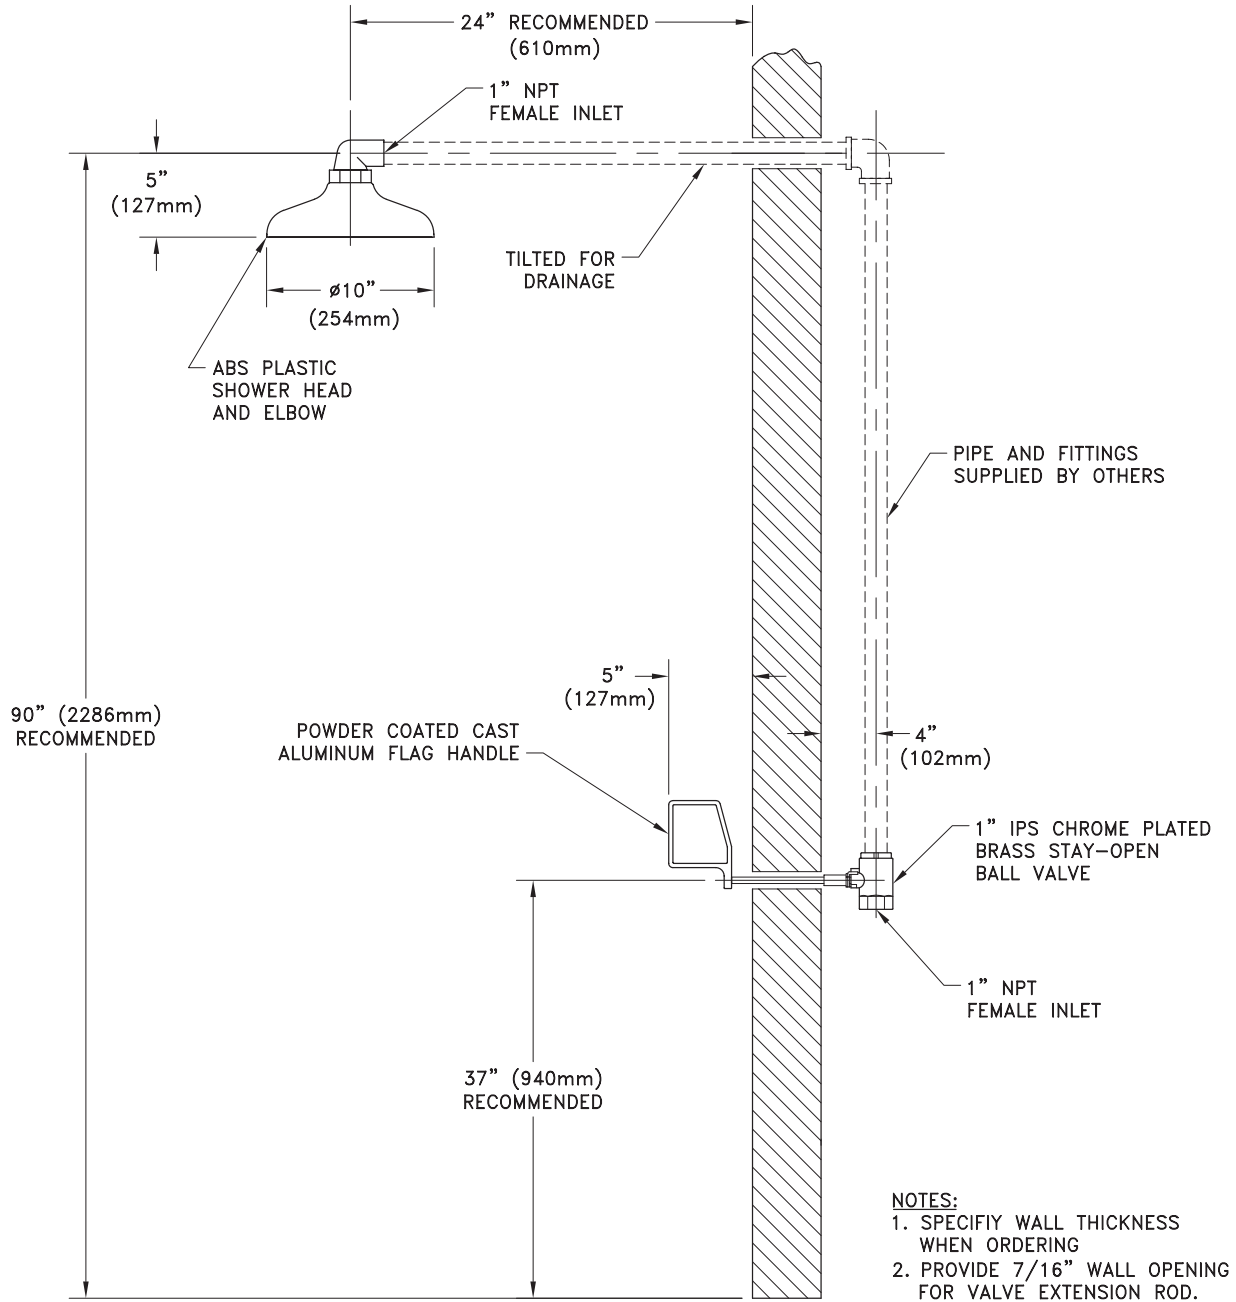

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0115

Sign Included



Guardian Equipment  
1140 N North Branch St  
Chicago, IL 60642

312 447 8100 TELEPHONE  
312 447 8101 FACSIMILE  
gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.



ETL Listed 101496. Units have been tested to and comply with ANSI Z358.1-2014.

