



- AP275-615** Flow Switch, 1-1/4" IPS for Safety Stations
- AP275-615C1D2** Same as Above Except Designed for Class 1 Division 2 Environment

Application: Single pole, double throw flow switch for use with emergency equipment. Flow switch is installed in water supply line upstream of emergency unit. When unit is activated, switch senses the movement of water in the supply line. Switch can be used to activate alarm horn and light or send electrical signal to monitoring system.

Installation: Flow switch is mounted in tee fitting that is installed in water supply line to emergency unit. Switch must be installed with tee fitting in horizontal position, flow switch body in vertical position and at least 6" from closest fitting. Direction of flow is marked on switch body. Furnished with weatherproof electrical junction box with gasketed cover. Switch operates at 125 volt up to a 5 amp max electrical connection.

Activation: AP275-615 activates at 0.75 GPM, deactivates at 0.60 GPM. AP280-615 activates at 3.0 GPM and deactivates at 1.75 GPM. AP285-615 activates at 1.5 GPM and deactivates at 1 GPM.

Quality Assurance: Unit is fully assembled, wired and factory tested prior to shipment.

Additional Models


- AP275-617** Same as above with double pole, double throw switch.
- AP280-615** Flow Switch, 1" IPS for emergency showers.
- AP285-615** Flow Switch, 1/2" IPS for eye and eye/face wash units.

Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com






- **AP275-615** Flow Switch, 1-1/4" IPS for Safety Stations
- **AP275-615C1D2** Same as Above Except Designed for Class 1 Division 2 Environment

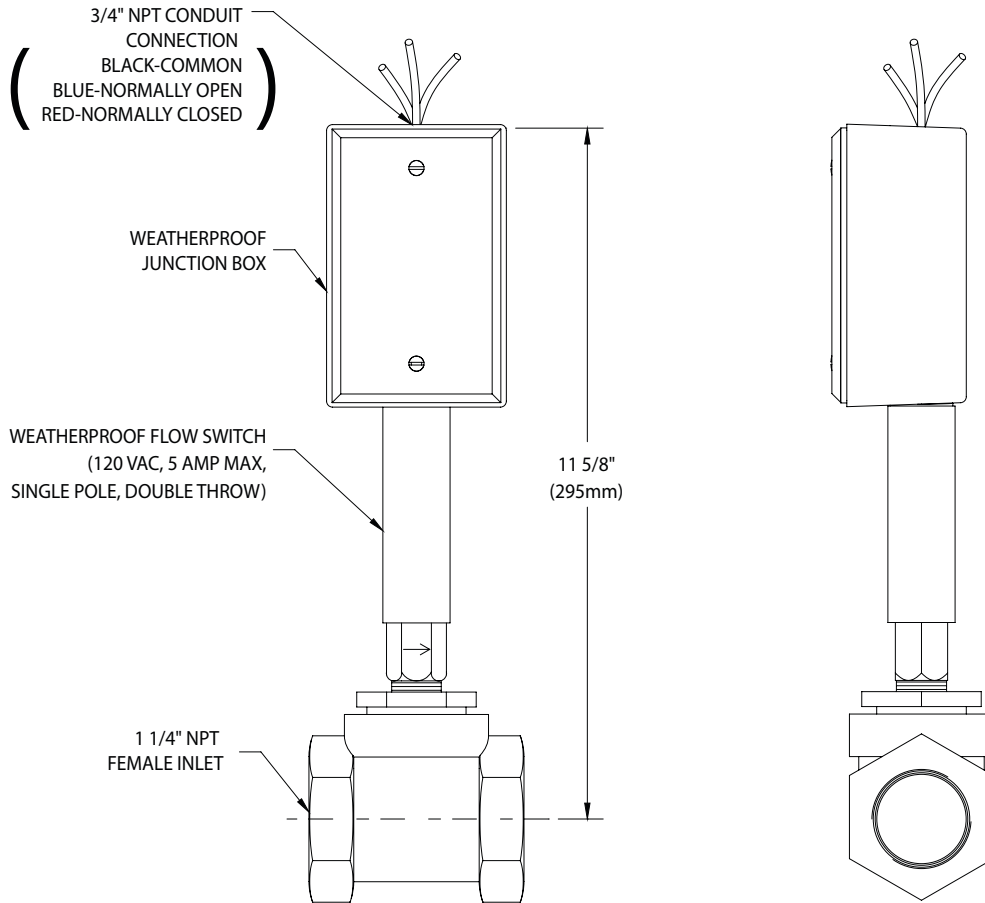

FLOW SWITCH
(NORMALLY OPEN)



NOTES:

1. FLOW SWITCH IS DESIGNED TO ACTIVATE AT 0.75 GPM AND DEACTIVATE AT 0.60 GPM.
2. FLOW SWITCH MUST BE INSTALLED VERTICALLY IN A HORIZONTAL PIPE RUN, UPSTREAM OF UNIT AND AT LEAST 6" FROM FITTING.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4"$ (6mm). rev. 0317

Distributed by:
 Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
 esupport@safetyemporium.com
 www.safetyemporium.com