



- **G1893** Eyewash, Deck Mounted 90° Swivel, All-Stainless Steel, Right Hand Mounting
- **G1893LH** Eyewash, Deck Mounted 90° Swivel, All-Stainless Steel, Left Hand Mounting



**Application:** All-stainless steel eyewash for mounting on counter next to sink. Spray heads swivel 90 degrees from storage to operational position. Unit is constructed entirely in stainless steel. Ideal for use in highly corrosive environments, cleanrooms and pharmaceutical applications.

**Spray Head Assembly:** Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

**Valve:** 1/2" IPS stainless steel stay-open ball valve. Valve has stainless steel ball and TFE seals.

**Mounting:** Unit may be mounted on right side (G1893) or left side (G1893LH) of sink. Furnished with locknut and washer for securing unit to countertop.

**Construction:** Type 316 stainless steel.

**Supply:** 1/2" NPT male inlet.

**Sign:** ANSI-compliant identification sign.

**Quality Assurance:** Unit is completely assembled and water tested prior to shipment.

### Available Options


- **TMV** G3600LF thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to “Tempering Units” section for complete technical and product selection information.

Distributed by:  
Safety Emporium  
PO Box 1003  
Blackwood, NJ 08012

Ph: (866) 326-5412 toll-free  
Fax: (856) 553-6154  
esupport@safetyemporium.com  
www. safetyemporium.com



- **G1893** Eyewash, Deck Mounted, 90° Swivel, All-Stainless Steel, Right Hand Mounting
- **G1893LH** Eyewash, Deck Mounted, 90° Swivel, All-Stainless Steel, Left Hand Mounting

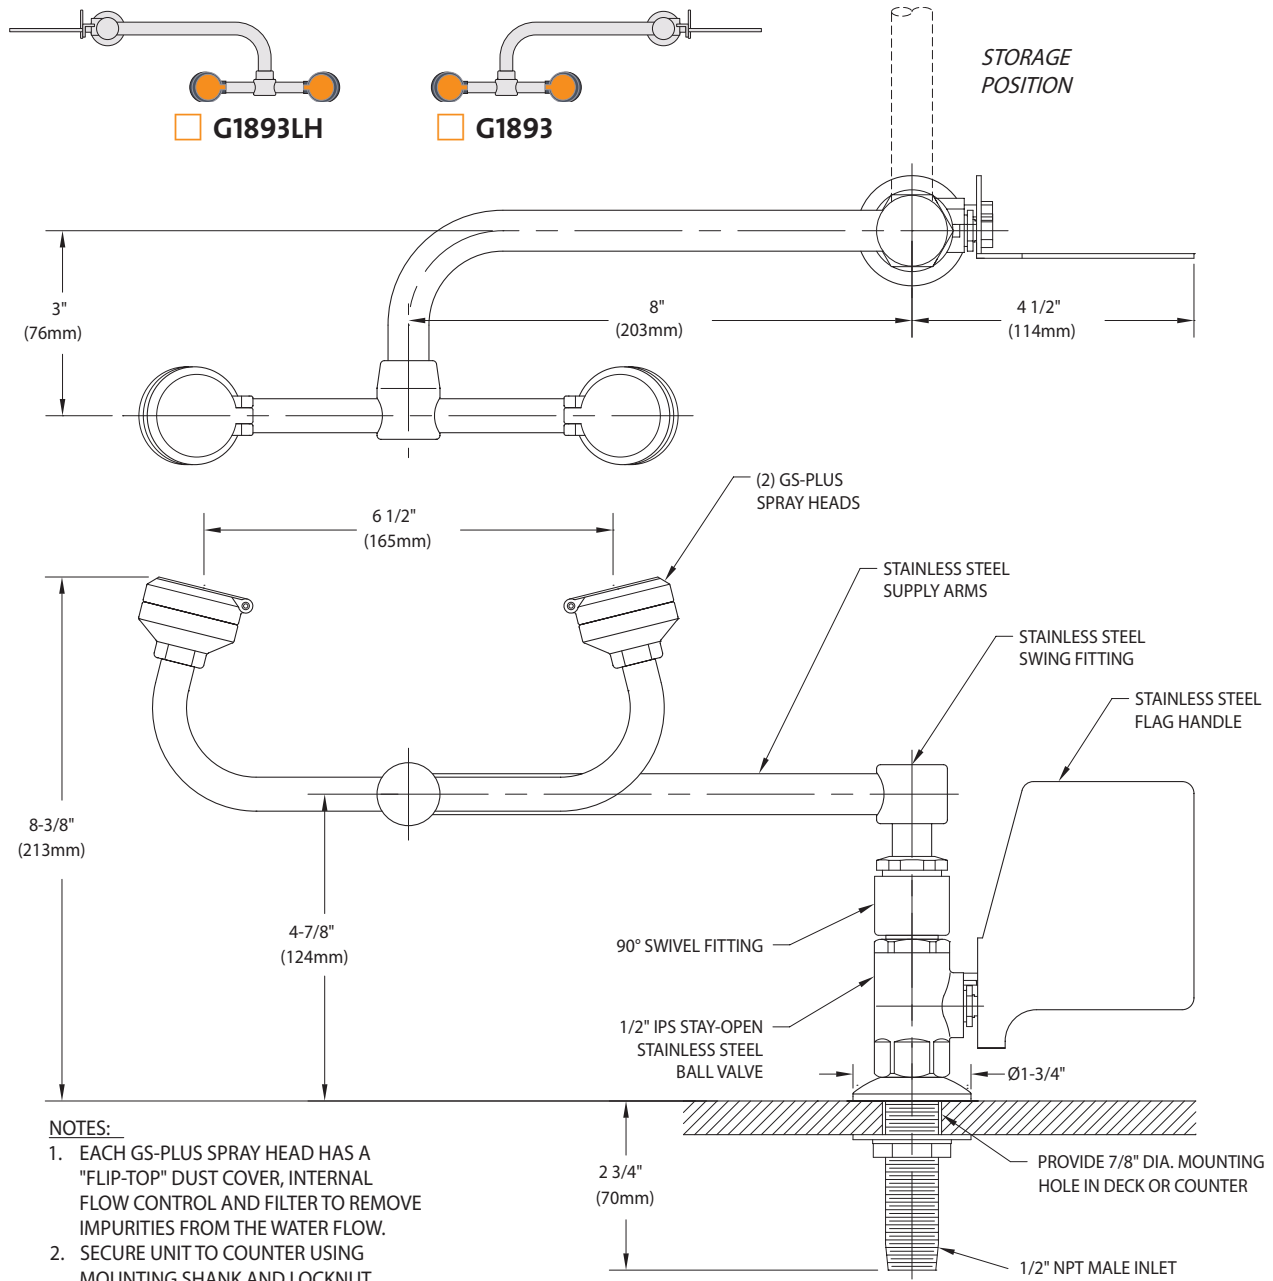

**NOTES:**

1. EACH GS-PLUS SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.
2. SECURE UNIT TO COUNTER USING MOUNTING SHANK AND LOCKNUT.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0115

Sign Included

