

G1896 Eyewash, Pedestal Mounted, PVC Construction with Stainless Steel Valve

Application: Free standing, pedestal mounted eyewash. Unit is constructed of PVC, PVC-coated components and a stainless steel valve for superior corrosion resistance. Ideal for industrial environments where harsh acids and caustics are present. Two GS-Plus[™] spray-type outlet heads deliver a flood of water for rinsing eyes.

Spray Head Assembly: Two GS-Plus[™] spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS Type 316 stainless steel stay-open ball valve. Valve has stainless steel ball and PTFE seals.

Bowl: 11-3/4" diameter orange ABS plastic.

Pipe and Fittings: Schedule 80 PVC.

Supply: 1/2" NPT female inlet.

Waste: 2" socket weld female outlet.

Sign: ANSI-compliant identification sign.

Quality Assurance: Unit is completely assembled and water tested prior to shipment.

Available Options

- G6020 Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Thermostatic Mixing Valves" section for complete technical and product selection information.
- **GRN** Green ABS plastic bowl.
- **YEL** Yellow ABS plastic bowl.

Distributed by: Safety Emporium PO Box 1003 Blackwood, NJ 08012 Ph: (866) 326-5412 toll-free Fax: (856) 553-6154 esupport@safetyemporium.com www.safetyemporium.com




312 447 8100 TELEPHONE 312 447 8101 FACSIMILE gesafety.com







G1896 Eyewash, Pedestal Mounted, PVC Construction with Stainless Steel Valve

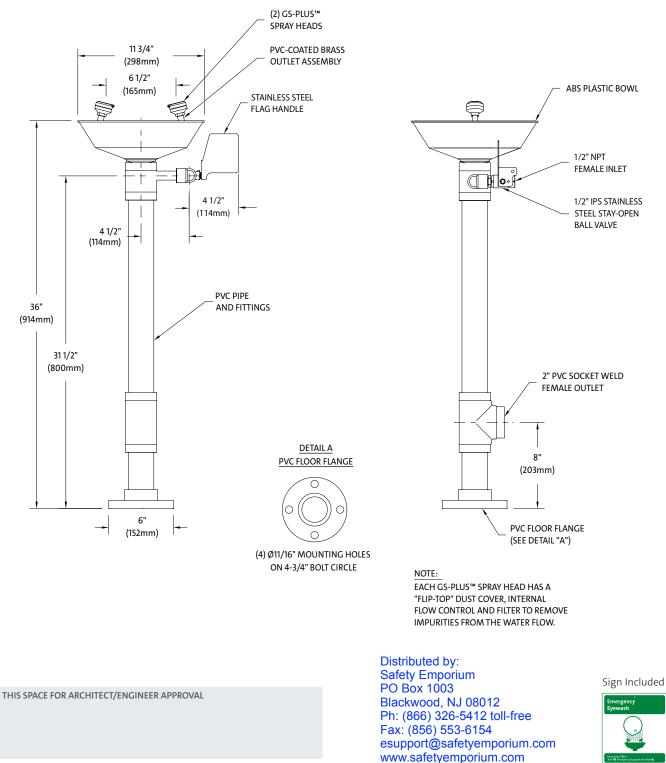

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are \pm 1/4" (6mm). rev. 021023

Guardian Equipment 1140 N North Branch St 312 447 8101 FACSIMILE Chicago, IL 60642

312 447 8100 TELEPHONE gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

