Barrier-Free Units



GBF1635 Barrier-Free Emergency Shower, Vertically Mounted, Plastic Shower Head GBF1635SSH Barrier-Free Emergency Shower, Vertically Mounted, Stainless Steel Shower Head

Application: Barrier-Free emergency shower for vertical mounting. Unit should be installed so that shower head is at least 82" above floor and 32" from wall or nearest obstruction.

ADA Compliance: When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach and distance from obstructions).

Shower Head: 10" diameter orange ABS plastic (GBF1635) or stainless steel (GBF1635SSH), with 20 GPM flow control.

Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 59-1/2" stainless steel pull rod.


Supply: 1" NPT female inlet.

Sign: ANSI-compliant identification sign.

Available Options

GRN Green ABS plastic shower head.

- **YEL** Yellow ABS plastic shower head.
- **G3800LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.

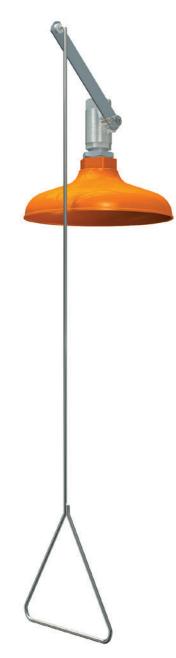

Distributed by: Safety Emporium PO Box 1003 Blackwood, NJ 08012 Ph: (866) 326-5412 toll-free Fax: (856) 553-6154 esupport@safetyemporium.com www. safetyemporium.com

Guardian Equipment 1140 N North Branch St 312 447 8101 FACSIMILE Chicago, IL 60642

312 447 8100 TELEPHONE gesafety.com










□ **GBF1635** Barrier-Free Emergency Shower, Vertically Mounted, Plastic Shower Head

GBF1635SSH Barrier-Free Emergency Shower, Vertically Mounted, Stainless Steel Shower Head

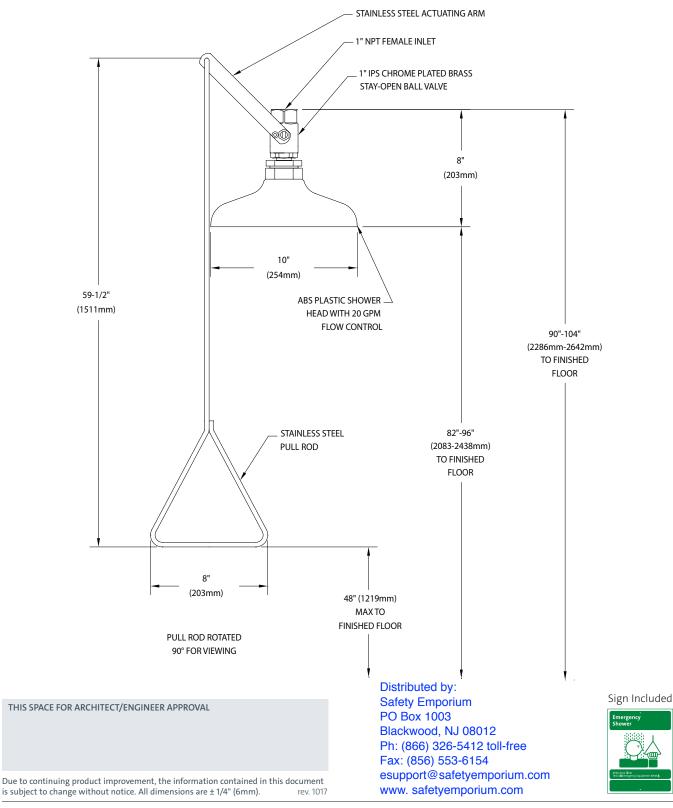

Guardian Equipment 1140 N North Branch St 312 447 8101 FACSIMILE Chicago, IL 60642

312 447 8100 TELEPHONE gesafety.com



Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

