

L681

Pure Water Faucet, Deck Mounted, Self-Closing Control



Application: Deck mounted faucet for distilled, deionized or reverse osmosis water. All components in contact with water have interior lining of pure tin.

Body: Forged brass.

Valve Unit: WaterSaver self-contained renewable unit with replaceable stainless steel seat. Valve has self-closing control.

Handle: Forged brass four-arm self-closing handle with color-coded index disc.

Gooseneck: 6" rigid gooseneck. Gooseneck is set in right hand configuration unless left hand or 180 degrees is specified.

Inlet: Furnished with 3/8" IPS mounting shank (assembled), locknut and washer. 3/8" NPT male inlet.

Outlet: 3/8" NPS female outlet with removable anti-splash serrated hose end.

Quality Assurance: Faucet is fully assembled and factory tested prior to shipment.

Additional Models

L682: Same as above except with swing gooseneck.

L684: Same as above except with convertible rigid/swing gooseneck.

Note: If self-closing lever handle is required, add suffix "LE".

Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

L691

Pure Water Faucet, Deck Mounted, Manual Control



Application: Deck mounted faucet for distilled, deionized or reverse osmosis water. All components in contact with water have interior lining of pure tin.

Body: Forged brass.

Valve Unit: WaterSaver self-contained renewable unit with replaceable stainless steel seat. Valve has manual on/off control.

Handle: Forged brass four-arm handle with color-coded index disc.

Gooseneck: 6" rigid gooseneck. Gooseneck is set in right hand configuration unless left hand or 180 degrees is specified.

Inlet: Furnished with 3/8" IPS mounting shank (assembled), locknut and washer. 3/8" NPT male inlet.

Outlet: 3/8" NPS female outlet with removable anti-splash serrated hose end.

Quality Assurance: Faucet is fully assembled and factory tested prior to shipment.

Additional Models


L692: Same as above except with swing gooseneck.

L694: Same as above except with convertible rigid/swing gooseneck.

Note: If wrist blade handle is required, add suffix "BH".

L2800-131WSA-TL

Pure Water Valve, Deck Mounted



Application: Deck mounted valve for distilled, deionized or reverse osmosis water. All components in contact with water have interior lining of pure tin.

Mounting: Deck mounted turret base with single outlet.

Valve Body: Straight pattern forged brass.

Valve Unit: WaterSaver self-contained compression valve unit with replaceable stainless steel seat.

Handle: Forged brass four-arm handle with color-coded index disc.

Inlet: Furnished with 3/8" IPS mounting shank (assembled), locknut and washer. 3/8" NPT male inlet.

Outlet: 3/8" NPT female outlet with removable anti-splash serrated hose end.

Quality Assurance: Fixture is fully assembled and factory tested prior to shipment.

Additional Model

L2800-132WSA-TL: Same as above except with two valves at 180 degrees.

Options for Tin-Lined Pure Water Faucets


Gooseneck: 8" spread gooseneck in place of 6" (add suffix "8"). For other gooseneck spreads and heights, please refer to page 56.

Vacuum Breaker: Gooseneck with integral vacuum breaker (add suffix "VB").

Outlet: BO055 aerator in place of serrated hose end (add suffix "55").

L2784WSA

Pure Water Faucet, Panel Mounted, Self-Closing Control

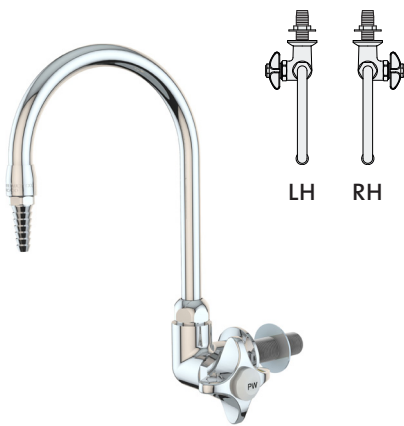

Application: Panel mounted faucet for distilled, deionized or reverse osmosis water. All components in contact with water have interior lining of pure tin.

Body: Forged brass.

Valve Unit: WaterSaver self-contained renewable unit with replaceable stainless steel seat. Valve has self-closing control.

Handle: Forged brass four-arm self-closing handle with color-coded index disc.

Gooseneck: 6" rigid/swing gooseneck.

Inlet: Furnished with 1/2" IPS mounting shank (assembled), locknut and washer. 1/2" NPT male inlet.

Outlet: 3/8" NPS female outlet with removable anti-splash serrated hose end.

Quality Assurance: Faucet is fully assembled and factory tested prior to shipment.

Additional Model

L2784L-WSA: Same as above except with handle on left side.

Note: If self-closing lever handle is required, add suffix "LE".

If mounting shank is to be unassembled, use suffix "WS".

Distributed by:
 Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
 esupport@safetyemporium.com
 www.safetyemporium.com

L2794WSA

Pure Water Faucet, Panel Mounted, Manual Control



Application: Panel mounted faucet for distilled, deionized or reverse osmosis water. All components in contact with water have interior lining of pure tin.

Body: Forged brass.

Valve Unit: WaterSaver self-contained renewable unit with replaceable steel seat. Valve has manual on/off control.

Handle: Forged brass four-arm handle with color-coded index disc.

Gooseneck: 6" rigid/swing gooseneck.

Inlet: Furnished with 1/2" IPS mounting shank (assembled), locknut and washer. 1/2" NPT male inlet.

Outlet: 3/8" NPS female outlet with removable anti-splash serrated hose end.

Quality Assurance: Faucet is fully assembled and factory tested prior to shipment.

Additional Model


L2794L-WSA: Same as above except with handle on left side.

Note: If wrist blade handle is required, add suffix "BH".

If mounting shank is to be unassembled, use suffix "WS".

L5100F-225WSA-TL

Pure Water Valve, Panel Mounted



Application: Panel mounted valve for distilled, deionized or reverse osmosis water. All components in contact with water have interior lining of pure tin.

Mounting: For installation on vertical or horizontal surfaces (such as pipe chases or service carriers) where there is access behind surface during installation.

Valve Body: Angle pattern forged brass.

Valve Unit: WaterSaver self-contained compression valve unit with replaceable stainless steel seat.

Handle: Forged brass four-arm handle with color-coded index disc.

Inlet: Furnished with 3/8" IPS mounting shank (assembled), locknut and washer. 3/8" NPT male inlet.

Outlet: 3/8" NPT female outlet with removable anti-splash serrated hose end.

Quality Assurance: Fixture is fully assembled and factory tested prior to shipment.

Additional Model

L5100FT-325TL: Same as above except with adjustable escutcheon for wall mounting.

Options for Tin-Lined Pure Water Faucets


Gooseneck: 8" spread gooseneck in place of 6" (add suffix "8"). For other gooseneck spreads and heights, please refer to page 56.

Vacuum Breaker: Gooseneck with integral vacuum breaker (add suffix "VB").

Outlet: BO055 aerator in place of serrated hose end (add suffix "55").

L7833

Pure Water Faucet, Polypropylene-Lined, Deck Mounted

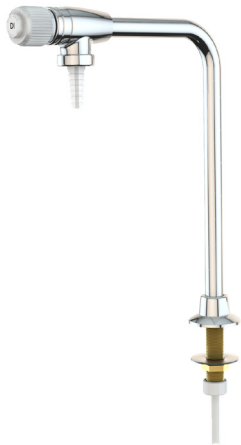

Application: Deck mounted faucet for distilled, deionized or reverse osmosis water. Faucet has exterior brass casing and interior lining of inert polypropylene. Pure water comes in contact only with inert plastic.

Valve Body: Forged brass.

Valve Unit: Diaphragm-type valve with brass valve stem and bonnet and inert PTFE diaphragm. Valve has manual on/off control.

Handle: White nylon knurled handle with color-coded index disc.

Riser: 6" rigid brass riser.

Inlet: Furnished with 3/8" IPS mounting shank (assembled), locknut and washer.

Pure water inlet is 3/8" OD polypropylene tube.

Outlet: Seven serration plastic hose end.

Quality Assurance: Faucet is fully assembled and factory tested prior to shipment.

Additional Models


L7833SC: Same as above except with toggle-style lever handle and self-closing control.

L7833MSC: Same as above except with toggle-style lever handle and combination manual/self-closing control.

Note: If PVDF lining is required, add suffix "PVDF".

L7834

Pure Water Faucet, Polypropylene-Lined, Panel Mounted



Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

Application: Panel mounted faucet for distilled, deionized or reverse osmosis water. Faucet has exterior brass casing and interior lining of inert polypropylene. Pure water comes in contact only with inert plastic.

Valve Body: Forged brass.

Valve Unit: Diaphragm-type valve with brass valve stem and bonnet and inert PTFE diaphragm. Valve has manual on/off control.

Handle: White nylon knurled handle with color-coded index disc.

Riser: 6" rigid brass riser.

Inlet: Furnished with 3/8" IPS mounting shank (assembled), locknut and washer.

Pure water inlet is 3/8" OD polypropylene tube.

Outlet: Seven serration plastic hose end.

Quality Assurance: Faucet is fully assembled and factory tested prior to shipment.

Additional Models

L7834SC: Same as above except with toggle-style lever handle and self-closing control.

L7834MSC: Same as above except with toggle-style lever handle and combination manual/self-closing control.

Note: If PVDF lining is required, add suffix "PVDF".

L7840

Pure Water Faucet, Polypropylene-Lined, Panel Mounted



Application: Panel mounted faucet for distilled, deionized or reverse osmosis water. Faucet has exterior brass casing and interior lining of inert polypropylene. Pure water comes in contact only with inert plastic.

Valve Body: Forged brass.

Valve Unit: Diaphragm-type valve with brass valve stem and bonnet and inert PTFE diaphragm. Valve has manual on/off control.

Handle: White nylon knurled handle with color-coded index disc.

Inlet: Furnished with 3/8" IPS mounting shank (assembled), locknut and washer.

Pure water inlet is 3/8" OD polypropylene tube.

Outlet: Seven serration plastic hose end.

Quality Assurance: Faucet is fully assembled and factory tested prior to shipment.

Additional Models

L7840SC: Same as above except with toggle-style lever handle and self-closing control.

L7840MSC: Same as above except with toggle-style lever handle and combination manual/self-closing control.

Note: If PVDF lining is required, add suffix "PVDF".

Options for Plastic-Lined Pure Water Faucets

Gooseneck: 8" spread gooseneck in place of 6" (add suffix "8"). For other gooseneck spreads and heights, please refer to page 56.

Vacuum Breaker: In-line polypropylene vacuum breaker installed between valve and serrated hose end (add suffix "7110").

L7853

Pure Water Faucet, Polypropylene-Lined, Deck Mounted



Application: Deck mounted faucet for distilled, deionized or reverse osmosis water. Faucet has exterior brass casing and interior lining of inert polypropylene. Pure water comes in contact only with inert plastic.

Valve Body: Forged brass.

Valve Unit: Diaphragm-type valve. Brass valve stem and bonnet with inert PTFE diaphragm. Valve has manual on/off control.

Handle: White nylon knurled handle with color-coded index disc.

Gooseneck: 6" rigid gooseneck.

Inlet: Furnished with 1-3/16" dia. mounting shank (assembled), locknut and washer. Pure water inlet is 1/2" OD polypropylene tube.

Outlet: Seven serration plastic hose end.

Quality Assurance: Fixture is fully assembled and factory tested prior to shipment.

Additional Models


L7853SC: Same as above except with self-closing four-arm handle.

L7853SC-LE: Same as above except with self-closing lever handle.

Note: If PVDF lining is required, add suffix "PVDF".

L7854

Pure Water Faucet, Polypropylene-Lined, Panel Mounted

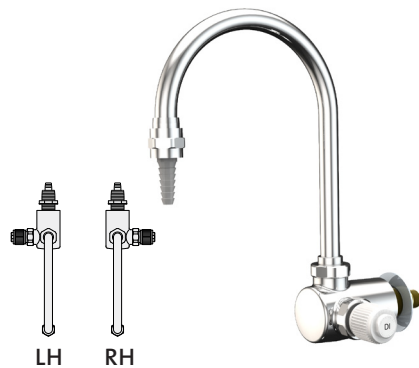

Application: Panel mounted faucet for distilled, deionized or reverse osmosis water. Faucet has exterior brass casing and interior lining of inert polypropylene. Pure water comes in contact only with inert plastic.

Valve Body: Forged brass.

Valve Unit: Diaphragm-type valve. Brass valve stem and bonnet with inert PTFE diaphragm. Valve has manual on/off control.

Handle: White nylon knurled handle with color-coded index disc.

Gooseneck: 6" rigid gooseneck.

Inlet: Furnished with 3/4" IPS mounting shank (assembled), locknut and washer. Pure water inlet is 1/4" NPT male thread.

Outlet: Seven serration plastic hose end.

Quality Assurance: Fixture is fully assembled and factory tested prior to shipment.

Additional Models

L7854L: Same as above except with handle on left side.

L7854SC: Same as above except with self-closing four-arm handle.

L7854SC-LE: Same as above except with self-closing lever handle.

Note: If PVDF lining is required, add suffix "PVDF".

L7837

Recirculating Pure Water Faucet, Polypropylene-Lined, Deck Mounted



Application: Recirculating deck mounted faucet for distilled, deionized or reverse osmosis water. Faucet is fully recirculating to eliminate all "dead legs" in pure water system.

Valve Body: Forged brass.

Valve Unit: Diaphragm-type valve. Brass valve stem and bonnet with inert PTFE diaphragm. Valve has manual on/off control.

Handle: White nylon knurled handle with color-coded index disc.

Riser: 6" rigid brass riser.

Inlet: Furnished with 7/8" OD mounting shank (assembled), locknut and washer. Pure water supply and return connections are 3/8" OD polypropylene tube.

Outlet: Seven serration plastic hose end.

Quality Assurance: Faucet is fully assembled and factory tested prior to shipment.

Note: If PVDF lining is required, add suffix "PVDF".

Distributed by:
 Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com