

CRLRST-010700 Fire Extinguisher Cabinet, Recess Mounted, Ligature-Resistant



Application: Recess mounted ligature-resistant powder coated steel cabinet for use with Oval Model 10J-ABC low-profile fire extinguisher (sold separately).

Mounting: Cabinet is recess mounted in wall (mounting hardware not included). Cabinet fits into standard 3-5/8" (92mm) partition wall, making it ideal for both new construction and retrofit applications.

Accessibility: Cabinet projects 5/8" (16mm) from wall surface, complying with the maximum limit for protruding objects as required by the Americans with Disabilities Act, 2010 ADA Standards for Accessible Design, International Building Code and ANSI/ICC A117.1. Recessed cabinet maximizes clear space in pathways and means of egress.

Ligature Resistance: Cabinet is designed to eliminate all potential points of attachment. Sides, top and bottom of cabinet are sloped. Corners are welded and ground smooth. Cabinet has solid door with keyed cylinder lock and without handle.


Cabinet: Fully welded 16 gauge cold rolled steel with a white powder coated finish as standard. Additional colors available as option (see below).

Tub: 22 gauge tub with white powder coated finish.

Door: 16 gauge steel door attached with continuous steel piano hinge. Door has welded reinforcement, (2) self-adjusting roller catches and does not have handle. Door opens 180 degrees. Cabinet is reversible so lock can be on either left or right side.

Window/Lock: Furnished without window and with keyed cylinder lock only.


Lettering: Furnished without lettering as standard. See below for lettering options.

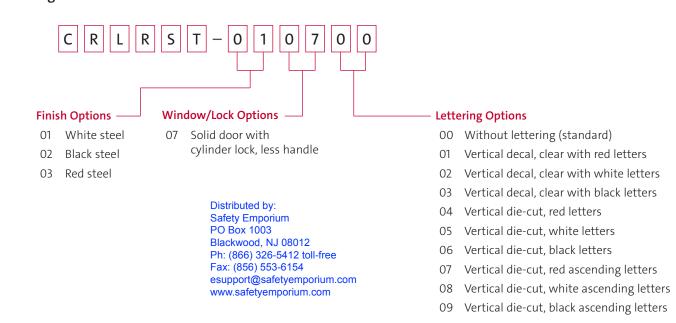

Ordering Information



CRLRST-010700 Fire Extinguisher Cabinet, Recess Mounted, Ligature-Resistant

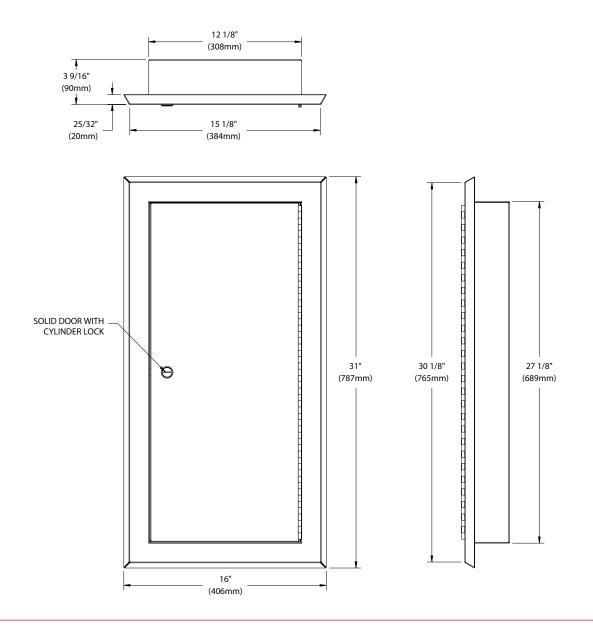

Recess Mount Cabinet Dimensions

	Tub ID				Frame OD		Recommended Wall Opening		
	Trim	Width	Height	Depth	Width	Height	Width	Height	Depth
	25/32" (20mm)	12" (305mm)	27" (686mm)	3-1/2" (89mm)	16" (406mm)	31" (787mm)	13" (330mm)	28" (711mm)	3-1/4" (83mm)
HIS SPACE FOR ARCHITECT/ENGINEER APPROVAL					Distributed by: Safety Emporium PO Box 1003 Blackwood, NJ 08012 Ph: (866) 326-5412 toll-free Fax: (856) 553-6154				
to continuing product improvement, the information contained in this document bject to change without notice. All dimensions are \pm 1/4" (6mm). Rev. 111119							safetyemporiuts safetyemporiuts safetyemporium.co		