

CSLRST-010700 Fire Extinguisher Cabinet, Surface Mounted, Ligature-Resistant



Application: Surface mounted ligature-resistant powder coated steel cabinet for use with Oval Model 10J-ABC low-profile fire extinguisher (sold separately).

Mounting: Cabinet is surface mounted on wall (mounting hardware not included). Installation does not require cutting into or modifying wall, making it the best option for retrofit applications.

Ligature Resistance: Cabinet is designed to eliminate all potential points of attachment. Sides, top and bottom of cabinet are sloped. Corners are welded and ground smooth. Cabinet has solid door with keyed cylinder lock and without handle.

Cabinet: Fully welded 16 gauge cold rolled steel with a white powder coated finish as standard. Additional colors available as option (see below).


Tub: 22 gauge tub with white powder coated finish.

Door: 16 gauge steel solid door attached with continuous steel piano hinge. Door has welded reinforcement, (2) self-adjusting roller catches and does not have handle. Door opens 180 degrees. Cabinet is reversible so lock can be on either left or right side.

Window/Lock: Furnished without window and with keyed cylinder lock only.


Lettering: Furnished without lettering as standard. See below for lettering options.

Ordering Information

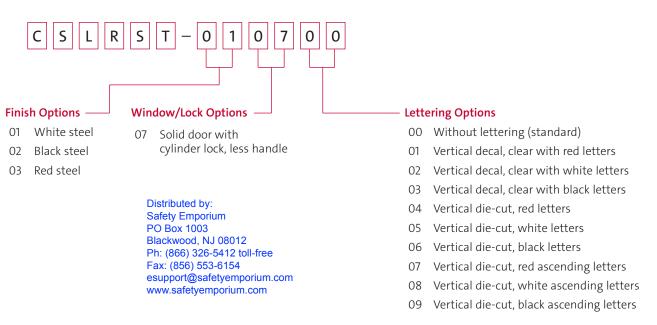



CSLRST-010700 Fire Extinguisher Cabinet, Surface Mounted, Ligature-Resistant

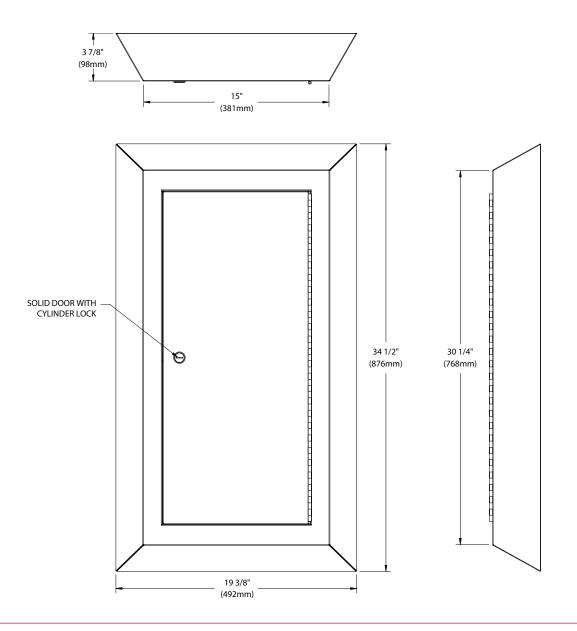

Surface Mount Cabinet Dimensions

	Tub ID			Frame OD	
	Width	Height	Depth	Width	Height
_	12" (305mm)	27" (686mm)	3-1/2" (89mm)	19-3/8" (492mm)	34-1/2" (876mm)
THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL				Distributed by: Safety Emporium PO Box 1003 Blackwood, NJ 0801 Ph: (866) 326-5412 Fax: (856) 553-6154	
ue to continuing product improvement, the information contained in this document subject to change without notice. All dimensions are $\pm 1/4^{\circ}$ (6mm). Rev. 111119			esupport@safetyempo www.safetyemporium.		