

EP02 - PU Foam Ear Plugs (200 pairs)

Collection: Ear Plugs
Range: Hearing Protection
Materials: PU Foam
Inner Pack: 200
Outer Carton: 10

Product information

PU foam disposable ear plugs made with soft and durable foam. Easy to insert and remove. Excellent attenuation level and a comfortable fit for long periods of use. Each pair comes inside an individual hygienic polybag with fitting instructions.




Hearing Protection

Hearing problems occur when you are exposed to hazardous working conditions without wearing the correct protective equipment.

Standards

ANSI S3.19 (NRR 32dB)
EN 352-2 (SNR 36dB)
EN 353-2 (SNR 33dB)

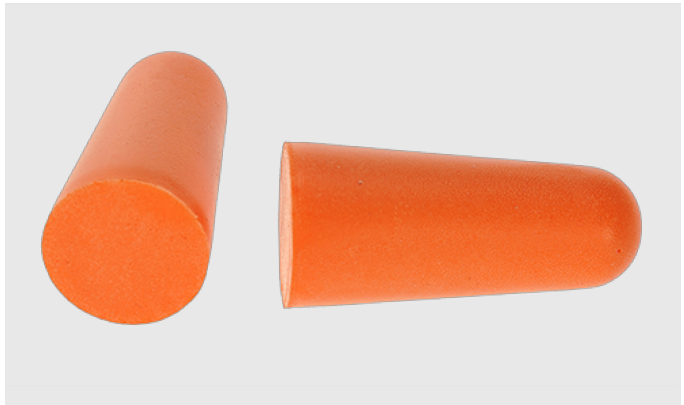

Features

- Disposable ear plugs made from soft PU foam
- Supplied in a handy portable dispenser box
- One pair per polybag for hygienic storage
- Easy to fit
- Excellent attenuation rate
- Retail box which aids presentation for retail sales
- Individually packed for vending machines
- This product is sold in pairs
- This product is sold in inner boxes
- UKCA marked

Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com



PRODUCT SPECIFICATION & TECHNICAL DATASHEET

EP02 - PU Foam Ear Plugs (200 pairs)
Commodity Code: 3926909790

Test House

ALIENOR CERTIFICATION (Notified Body No.: 2754)
ZA du Sanital
86100, France
Cert No: 2754/1246/159/06/18/0288

SATRA Technology Centre Ltd (Notified Body No.: AB: 0321)
SATRA Technology Park
NN16 8SD, United Kingdom
Cert No: AB0321/18870-01/E00-00

Michael & Associates, Inc. (Notified Body No.:)
2766 W. College Ave Suite 1
PA 16801, United States

Carton Dimensions/Weight

Item	Colour	Len	Wid	Hgt	Weight(Kg)	Cubic(m ³)	EAN13	DUN14
EP02ORR	Orange	60.0	35.0	33.0	0.4580	0.0693	5036108171941	15036108622365

Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com

PERFORMANCES - SOUND ATTENUATION - EN352-2:2002

EP02/EP08/EP30								
A	Frequency (Hz)	125	250	500	1000	2000	4000	8000
B	Means Attenuation (dB)	36.5	34.2	39.1	37.8	39.6	44.9	46.2
C	Standard Deviation (dB)	4.7	4.5	4.8	5.8	4.0	6.4	6.2
D	Assumed Protection (dB)	31.7	29.7	34.2	32.0	35.5	38.5	40.1
SNR = 36 dB H = 36 dB / M = 33 dB / L = 32 dB								

PERFORMANCES - SOUND ATTENUATION ANSI S.19-1974

Tested by Michael & Associates, Inc. – 400 Long Lane, PA Furnace, PA 16865, USA

EP02/EP08										
A	Frequency (Hz)	125	250	500	1000	2000	3150	4000	6300	8000
B	Means Attenuation (dB)	39.8	40.4	42.6	40.3	39.1	45.2	45.7	48.3	47.4
C	Standard Deviation (dB)	3.0	3.9	2.9	3.6	3.7	3.0	2.5	4.9	3.7
NRR (Noise Reduction Rating) = 32 dB										

EP02ORR

Distributed by:
 Safety Emporium
 PO Box 1003
 Blackwood, NJ 08012
 Ph: (866) 326-5412 toll-free
 Fax: (856) 553-6154
esupport@safetyemporium.com
www.safetyemporium.com