



LED EXIT & INCANDESCENT EMERGENCY COMBO



LED4



LED4B



LED7

Illumination

- Two fully-adjustable 5.4 watt, glare-free lamp heads.
- Smooth thermoplastic reflector and plastic lens for optimal light distribution.
- Ultra-bright, energy efficient, long-life Red (LED4 and LED4B) or Green (LED7) LED exit sign illumination.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board/lamp heads for minimum 90-minute emergency illumination.
- Solid-state, two-rate charger fully recharges battery in 24 hours.

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal Knockout pattern on back plate for wall mount.


Housing

- Injection molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in a white (LED4 and LED7) or black finish (LED4B).
- EZ snap out Chevron directional indicators.

Warranty/Listing

- Five year warranty on all electronic and housing. Battery prorated for five years
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA
- UL listed for damp locations. (20°C – 40°C)

Dimensions

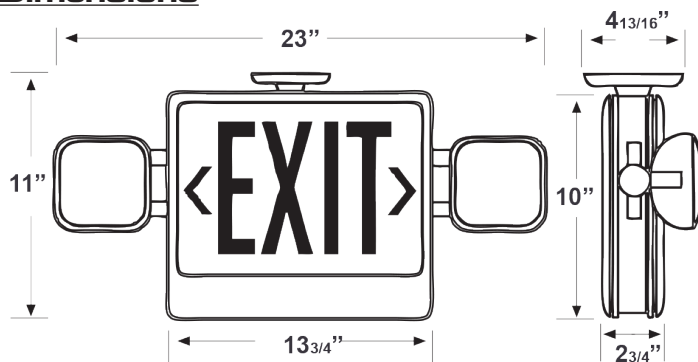

Distributed by:
Safety Emporium
www.safetyemporium.com