



# How to Set the DIGI-DAY® Mini- Electronic Scoreboard

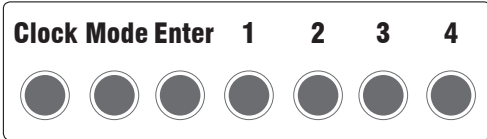

## Counter Indicator On Hold

**Press ENTER button once.** This freezes or pauses the number of days. There will be an indicator dot. To resume counter function, **press ENTER button once.** Indicator dot will turn off.

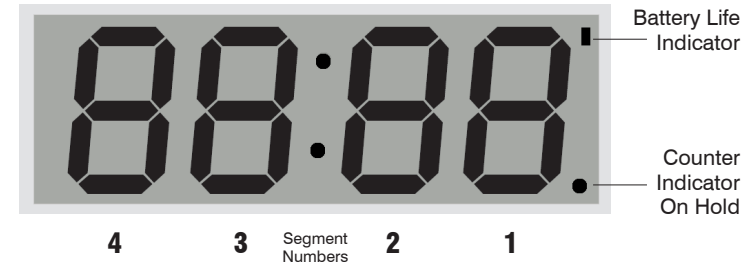

**Battery:** Replacement battery available. Order part number HPB118.

## Step 1

### Verify Count-Up Function

**Press MODE button once.** Display will flash. In display segment 4, the horizontal bar is to be at the top to count-up, or press button 4 to change bar to bottom to count-down. In display segment 3, there should be a vertical bar - if not, press button 3 for vertical bar to appear. **Press ENTER button once.**



## Step 2

### Set the Number of Days

**Press MODE button twice.** Display will flash (with bottom dot). Press buttons that correspond to the segment numbers to advance to desired number of days. (Example: 365 days) **Press ENTER button once.**



## Clock

**Press CLOCK button once.** To view time on display (in 24-hour clock). **Press CLOCK button once.** Number of Days will display.

## Step 3

### Set the Time of Day

**Press MODE button three times.** Display will flash (with colon dots). Display operates on 24-hour clock (i.e., 2:15 pm is 14:15). Press button that corresponds to the segment numbers, to advance to actual time of day. **Press ENTER button once.** **NOTE:** Midnight is 00:00.



## Step 4

### Set the Time for Number to Change

**Press MODE button four times.** Display will flash (with bottom colon dot). Display operates on 24-hour clock (i.e., 5:00 pm is 17:00). Press button that corresponds to the segment numbers, to advance to time for number of day to change. **Press ENTER button once.** **NOTE:** Midnight is 00:00.



ACCUFORM SIGNS®

www.accuform.com | 800.237.1001

Distributed by:  
Safety Emporium  
PO Box 1003  
Blackwood, NJ 08012

Ph: (866) 326-5412 toll-free  
Fax: (856) 553-6154  
esupport@safetyemporium.com  
www.safetyemporium.com

SCLFORM