



- GBF1643** Barrier-Free Emergency Shower, Horizontally Mounted, Plastic Shower Head
- GBF1643SSH** Barrier-Free Emergency Shower, Horizontally Mounted, Stainless Steel Shower Head

**Application:** Barrier-Free emergency shower for horizontal mounting. Unit should be installed so that shower head is at least 82" above floor and 32" from wall or nearest obstruction.

**ADA Compliance:** When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach and distance from obstructions).

**Shower Head:** 10" diameter orange ABS plastic (GBF1643) or stainless steel (GBF1643SSH), with 20 GPM flow control.

**Valve:** 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 59-1/2" stainless steel pull rod.

**Pipe and Fittings:** 1" IPS galvanized steel nipple and street elbow.

**Supply:** 1" NPT female inlet.

**Sign:** ANSI-compliant identification sign.

### Available Options

- GRN** Green ABS plastic shower head.
- YEL** Yellow ABS plastic shower head.
- PCC** All-polished chrome plated brass construction.
- AP280-200** Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.
- APBF250-015** Modesty curtain for mounting on Barrier-Free safety station.
- G3800LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.




Distributed by:  
Safety Emporium  
PO Box 1003  
Blackwood, NJ 08012  
Ph: (866) 326-5412 toll-free  
Fax: (856) 553-6154  
esupport@safetyemporium.com  
www.safetyemporium.com





- **GBF1643** Barrier-Free Emergency Shower, Horizontally Mounted, Plastic Shower Head
- **GBF1643SSH** Barrier-Free Emergency Shower, Horizontally Mounted, Stainless Steel Shower Head

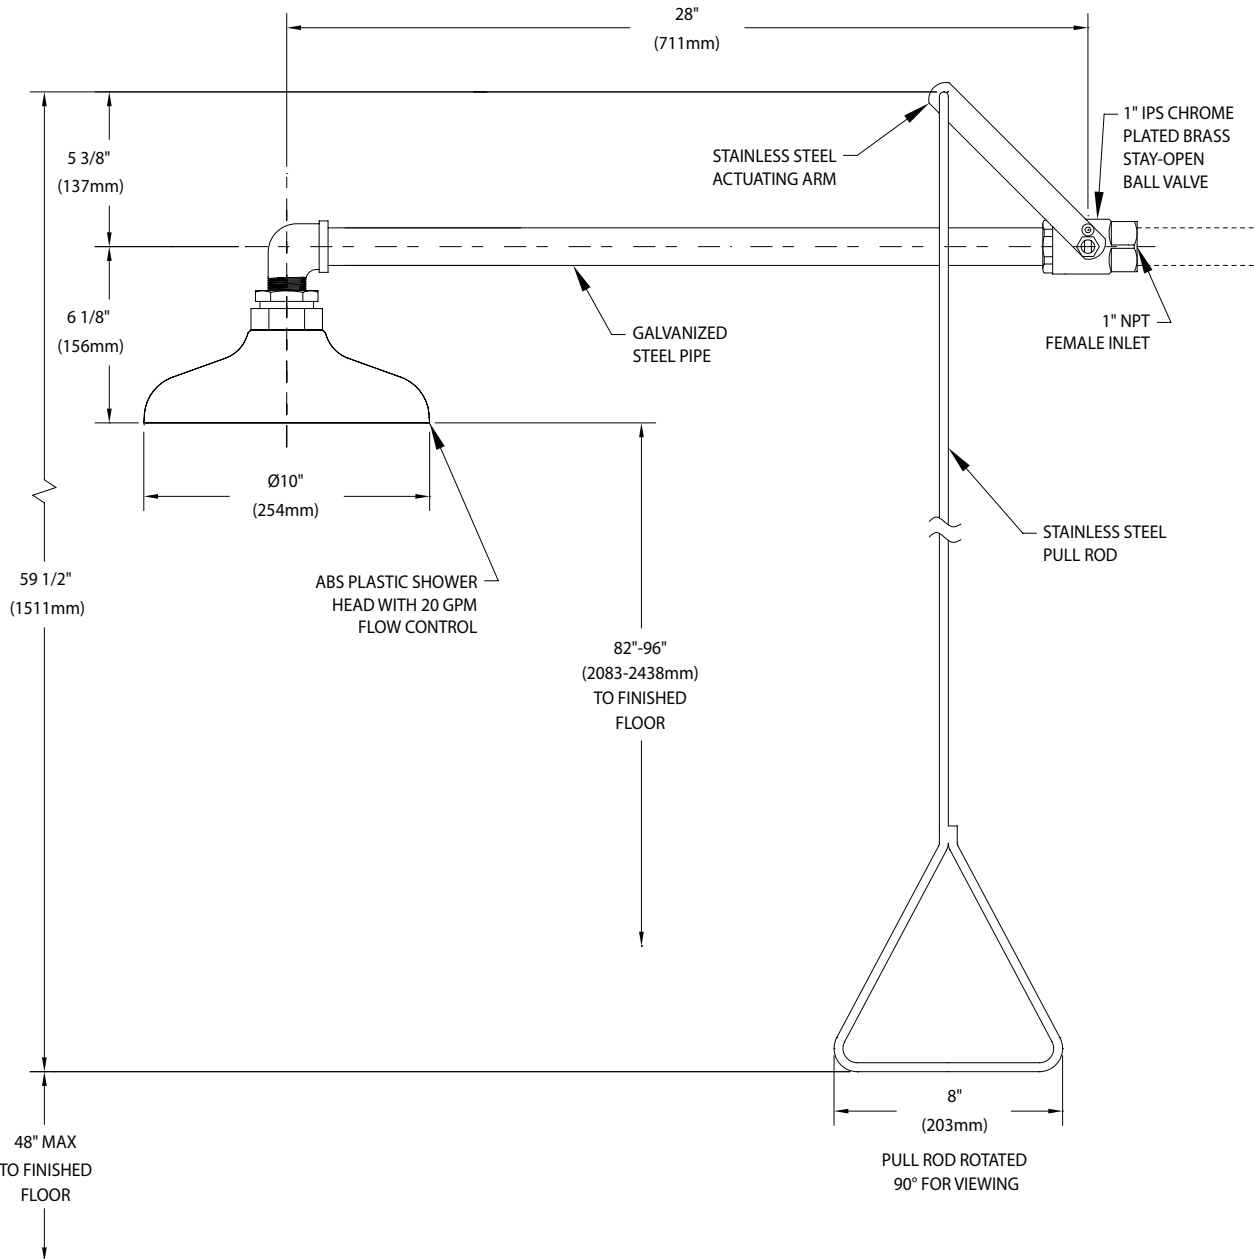

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 1117

Distributed by:  
**Safety Emporium**  
 PO Box 1003  
 Blackwood, NJ 08012  
 Ph: (866) 326-5412 toll-free  
 Fax: (856) 553-6154  
 esupport@safetyemporium.com  
 www.safetyemporium.com

Sign Included



Guardian Equipment 312 447 8100 TELEPHONE  
 1140 N North Branch St 312 447 8101 FACSIMILE  
 Chicago, IL 60642 gesafety.com



Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

